

Improving Upon Best Available Technology: A Clean and Quiet Snowmobile

Seth Wallander, Steve Lukas, Adam Schumacher, Nicholas Rakovec, Dr. Glenn R. Bower

University of Wisconsin-Madison

ABSTRACT

The University of Wisconsin-Madison Snowmobile Team has designed and constructed a clean, quiet, high performance snowmobile for entry in the 2007 Society of Automotive Engineers' Clean Snowmobile Challenge. Built on a 2003 cross-country touring chassis, this machine features a 750 cc fuel-injected four-stroke fueled by an 85% blend of ethanol and gasoline (E85). The engine has been retrofit with a Mototron control system which allows for full engine optimization using E85. Improving on the engine's EPA Best Available Technology certification, a W.C. Heraeus-GmbH dual three-way catalyst further reduces NOx, HC and CO emissions by up to 94%. The entire engine and two-stage muffler system is packaged in a manner that maintains the snowmobile's aggressive OEM appearance.

INTRODUCTION

The Society of Automotive Engineers (SAE) developed the "Clean Snowmobile Challenge" (CSC) in 2000 when snowmobiles were banned from National Parks. It is an engineering design competition among colleges and universities that demonstrates clean, quiet and futuristic alternatives to the conventional two-stroke snowmobile. Competition entries are redesigned versions of original equipment manufacturer (OEM) snowmobiles and are expected to significantly reduce unburned hydrocarbons, carbon monoxide, nitrous oxide, and noise emissions while maintaining a consumer acceptable level of performance. Successful CSC entries must also demonstrate reliability, efficiency, and cost effectiveness. The 2007 CSC will be held in Michigan's Keweenaw Peninsula from March 19-24.

The following paper discusses how the University of Wisconsin – Madison team has engineered an entry for the 2007 CSC that improves upon the industry's best available emissions and sound technology, while maintaining exceptional riding characteristics. The first

section addresses the engine selection process and fuel choice. The second section describes modifications to the snowmobile's drivetrain. The third section focuses on emissions and emissions reduction techniques. The next section discusses specific design enhancements that reduce overall snowmobile noise. Finally, the paper addresses general snowmobile modifications employed to enhance the previously mentioned technologies. In addition, the paper summarizes the implementation costs compared to a comparable production snowmobile.

PERFORMANCE

The guiding principles for the 2007 UW-Madison clean snowmobile design are simplicity and practicality: the design objective is to win the Clean Snowmobile Challenge with a snowmobile that is not only clean and quiet, but maintains the speed and handling characteristics that consumers expect from a modern snowmobile.

In order to market to this group, the team first determined the characteristics which are important to riders in that demographic sector. In fall of 2006, the team attended the World Championship Snowmobile Derby in Eagle River, WI. While exhibiting the 2006 CSC entry, the team surveyed approximately 60 attendees with the goal of determining the performance requirements of the average consumer. The volunteers were asked to choose the two most important characteristics when buying a snowmobile from the following list: acceleration, handling, top speed, price, fuel economy, and emissions. The results, as seen in Figure 1, show that acceleration and trail handling influence a buyer significantly more than top speed, price, fuel economy or emissions.

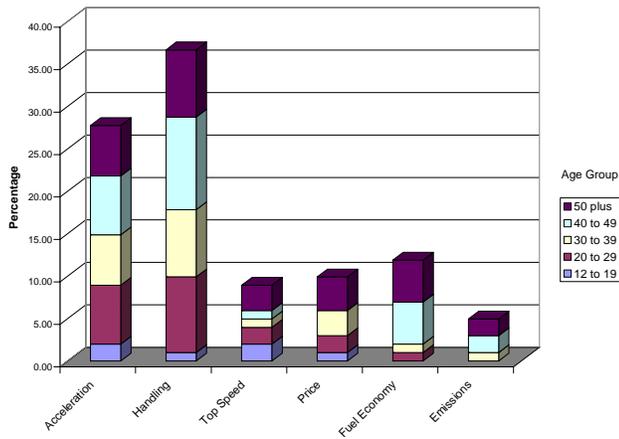


Figure 1: A survey of 60 snowmobilers shows that acceleration and trail handling are the most important considerations when purchasing a snowmobile.

The survey results confirm the guiding principles of the Wisconsin Clean Snowmobile Team. Across every age group, snowmobilers will not accept an environmentally friendly snowmobile if it does not exhibit acceptable acceleration and handling performance.

To more broadly confirm the survey results, the team checked the industry sales numbers for the 2006 model year. The manufacturer with the highest market share, Bombardier Recreational Product's Ski-Doo line, exclusively builds lightweight high performance two strokes that demonstrate excellent acceleration and handling characteristics. Also, the best selling single model from 2006, Polaris' 600 HO I.Q., has excellent handling and acceleration [1]. These results clearly fall in line with the data collected in the consumer survey.

Engine Option Evaluation

Given the market survey results demanding a snowmobile with excellent acceleration and handling, the team searched for engines with good power-to-weight ratios. Engines were considered on a basis of hydrocarbon (HC), carbon monoxide (CO), and nitrogen oxide (NO_x) emissions, power-to-weight ratio, cost, and ease of implementation. To match the design to CSC competition objectives, emissions and power-to-weight ratios were equally weighted, followed sequentially by ease of implementation and cost. The following engine options were considered by the team:

- Two-stroke (conventional) snowmobile engines
- Semi-direct injection (SDI) snowmobile two-strokes
- Four-stroke snowmobile engines
- Turbo-charged four-stroke snowmobile engines

- Direct injection (DI) two-stroke marine engines
- Four-stroke personal watercraft (marine) engines
- Compression ignition (CI) engines
- High-compression motorcycle four-stroke engines
- V-twin motorcycle four-stroke engines

The choice between current snowmobile engine technologies is fairly straightforward. Conventional and SDI two-strokes have significantly higher power-to-weight ratios than current snowmobile four-strokes. However, snowmobile emissions testing conducted by Southwest Research Institute (SwRI) clearly states that commercially available four-strokes "...emit 98-95 percent less HC, 85 percent less CO, and 90-96 percent less PM" than conventional two-stroke snowmobile engines [2]. Though four-strokes have significantly higher NO_x than two-strokes, the study notes that the use of a catalyst system on a four-stroke can nearly eliminate NO_x, while further reducing HC and CO.

While the SwRI study did not evaluate SDI two-stroke technology, current publications from Bombardier Recreational Products, the developer of SDI technology, suggests that the system improves emissions only 50% over conventional two-strokes [3]. While SDI engines are a significant improvement compared to conventional two-strokes, they cannot attain current four-stroke emission levels. Aside from the three pollutants measured for competition scoring, two-stroke spark ignition engines are known emitters of benzene, 1,3-butadiene and gas-phase and particle-phase polycyclic aromatic hydrocarbons, all of which are classified as known or probable carcinogens by the U.S. Environmental Protection Agency (EPA) [4].

The team evaluated compression ignition (CI) engines, recognizing their excellent HC and CO emissions. However, CI engines were eliminated from consideration due to their poor power to weight ratio and cold start limitations. Similarly, the marine engine options were eliminated because of their low power to displacement ratios. CSC rules restrict four-stroke displacement to 960 cc and current marine outputs in this range produce only 40-50 hp. At these power levels, four-stroke engines designed for snowmobiles and ATVs offer far easier implementations. The difficulty of adapting a four-stroke motorcycle V-twin engine to a snowmobile CVT eliminated this option, though the team recognized the excellent low-end torque this engine configuration achieves without compromising emissions.

Final Engine Selection

Given the heavy weighting on emissions in CSC competition scoring, the team determined that a

commercially available snowmobile or high-compression motorcycle four-stroke engine offered the most potential. High-compression motorcycle four-strokes such as the Kawasaki ZX9R and Yamaha RX engines have substantially higher power output (130+ kW) compared to the Arctic Cat 660 and Polaris FS four-stroke engines (each 40+ kW). Commercially available turbocharged versions of the FS and 660 are capable of power output close to that of motorcycle engines (100+ kW). To compare the emissions of different engines, the UW team examined a 2002 SwRI study which compared conventional two-stroke snowmobile emissions to that of the Arctic Cat 660 and the Polaris Liberty. As seen in Table 1, the un-catalyzed four-stroke engines slightly increase NO_x emissions while significantly reduce HC and CO emissions.

Table 1: Emissions Data from a 2002 SwRI Study [2].

	HC g/kW-hr	CO g/kW-hr	NO _x g/kW-hr
Two-stroke average (SwRI 2002)	189	517	0.72
Arctic Cat 660 (4s) (SwRI 2002)	6.2	79.9	10.6
Polaris Liberty (4s) (SwRI 2002)	3.2	79.1	7.0

To achieve the low CO and HC levels of the Idaho and Polaris four-strokes, a high-compression motorcycle engines would need to employ catalytic after-treatment. Integrating a three-way catalyst into the Kawasaki ZX9R proved particularly difficult for UW-Madison in 2003. High compression four-stroke engines are designed to run slightly rich of stoichiometric in order to control exhaust temperatures and maximize high-speed power output. Forcing the engine to operate at the stoichiometric air-fuel ratios necessary for efficient three-way catalyst operation causes excessive exhaust temperatures. Kevin Cameron of SnowTech concurs, noting that valve overlap (the crank angle duration that both the intake and exhaust valves are open) gives these engines excellent torque at the cost of higher emissions [5].

High-performance turbocharged snowmobile engines such as the Polaris FST and Arctic Cat 660T provide much more power than the equivalent non-turbocharged engines, but at a penalty of increased emissions and cost. While the non-turbocharged FS engine is EPA 2012 emissions certified, the FST is not [6]. Therefore, the team decided that, while turbo-charging would provide increased power, the increased emissions would not be acceptable.

Given the core objectives of the CSC, the added power of a high-compression motorcycle engine or turbocharged snowmobile engine is not justified by their poorer emissions. Therefore, the team selected the 750 cc Polaris FS non-turbocharged four-stroke engine for this year's snowmobile (Table 2). In its stock configuration, this engine is EPA 2012 certified and produces nearly 60 kW of power, comparable to a 500 cc two-stroke engine [7]. This combination provides enough power to satisfy the performance demands of the snowmobile enthusiast, while maintaining low emissions required by law.

Table 2: Polaris FS Engine Specifications [8]

Engine Type	Four Stroke
Cooling	Liquid
Cylinders	2
Displacement	750 cc
Bore x Stroke (mm)	85 x 66
Ignition	Bosch
Exhaust	Single
Fueling	EFI

Fuel Choice

As fuel prices increase and consumers become more concerned with the source of their fuel, domestically produced ethanol has been proposed as a possible solution. Although the energy density of ethanol is not as high as standard gasoline, ethanol has the advantages of being an environmentally friendly renewable resource. E85 is an alcohol fuel mixture that normally contains a mixture of 85% denatured fuel ethanol and 15% gasoline by volume. To ensure cold-startability, the ethanol component may be dropped to 70% during the winter months so that blending with a standard winter gasoline will produce an acceptable vapor pressure—a higher vapor pressure will produce faster fuel evaporation necessary for cold weather engine starting. Otherwise, special, more volatile hydrocarbons can be mixed with the ethanol to maintain the 85% mixer while supplying an appropriate winter vapor pressure (~100 kPa): Gage Fuels supplies this type of E85 for the SAE Clean Snowmobile Challenge.

The 2007 CSC offers a 100 point bonus for any team that successfully runs on 85% ethanol (E85) while meeting 2012 emissions requirements. E85 will also be the only fuel choice for the 2008 CSC competition. In order to take advantage of the 100 point bonus, and prepare for the 2008 CSC, the Wisconsin team decided to utilize E85 for their 2007 CSC entry.

POWERTRAIN ENHANCEMENT

Once the team chose the Polaris FS snowmobile engine, the next step was to integrate it into our existing chassis. This required fabrication of engine mounts, engine intake, new clutching, and chaincase gearing. Per our stated design goals, this all had to be packaged while maintaining the stock appearance of the snowmobile.

The first step in installing the FS engine was to fabricate new aluminum engine mounts. The engine was positioned to maintain optimal center-to-center clutch distance and engine angle. The team then designed and constructed new engine mounting brackets using Solidworks software, using the stock Polaris Frontier and FS engine mounting locations as a template. In an effort to optimize the longevity of the mounts and reduce vibration transmitted into the chassis, the team utilized rubber vibration isolation mounts in non-parallel planes. Finally, the mounts were powder-coated black to improve the under-hood appearance.



Figure 2: Clutch-side engine mounting bracket during fabrication phase.

Due to differences in steering column and jackshaft location between the EDGE chassis and the original IQ chassis, a new design for the throttle bodies and induction system was required. To simplify final calibration of the engine and improve reliability, the team integrated the stock throttle bodies into a custom intake system. The new intake system was assembled from aluminum tube. After welding, the interior passages were polished to optimize airflow and increase efficiency. The longer intake passages also helped improve the engine's low-end torque.

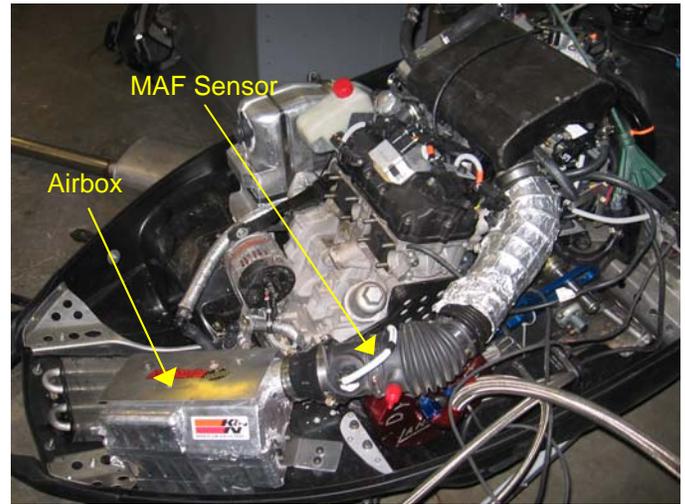


Figure 3: Air box construction and location. Note the mass air flow sensor used for engine calibration.

The air box of the UW snowmobile features a large two stage air box system that features an upper and lower box assembly. The large overall size of the dual air box assembly reduces the velocity of air in the system, which thereby reduces intake noise. The upper portion air box was constructed from aluminum and shaped to maximize airflow and minimize size, allowing the use of an unmodified hood. The aluminum upper air box was covered with a sound-dampening rubber compound to reduce resonant vibration and intake noise. The upper air box pulls air through an adapted automotive air intake system from the lower air box. The lower air box intake location was optimized to minimize inducted air temperature based on data logged during actual riding conditions.

The FS engine oil system was also modified for integration into the sled. The FS engine uses a dry sump design to allow a lower mounting point, improving handling by lowering the center of gravity. The dry sump design requires a separate oil reservoir. The team used the stock FS reservoir to ensure correct flow and reserve volume and mounted it in a central location near the airbox. This location allows for more room in the engine bay for mufflers and sound dampening. The reservoir was coated with reflective material to minimize heat absorbed from the nearby muffler. Oil lines running near hot exhaust components are covered in reflective insulation to prevent heat damage.

To improve cooling efficiency, the team utilized an oil cooler mounted near the front of the lower cowl. Oil is circulated from the engine's crankcase, through the heat exchanger, and back into the reservoir. Vents were cut into the lower cowl to maximize airflow through the oil cooler and provide additional under-hood cooling.

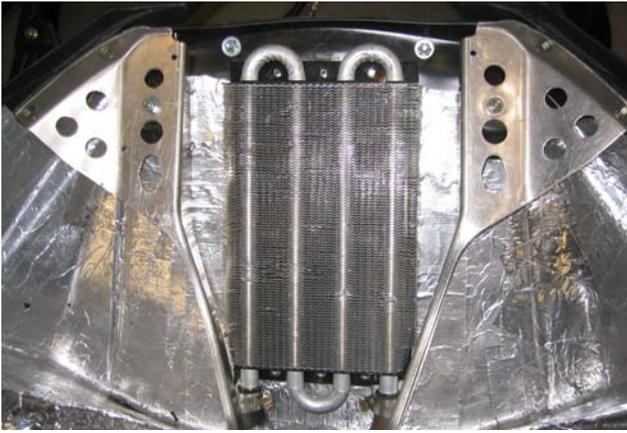


Figure 4: Picture of the oil cooler mounting system designed to efficiently cool the FS engine.

To optimize the gearing, we replaced the stock primary clutch weights and secondary helix with appropriately chosen parts. In addition, the team added a Team Industries roller secondary clutch, improving transient performance. The roller secondary clutch provides increased transmission efficiencies through decreased friction, and much quicker up and back shifting than the stock slider clutch. A 19/39 gear-set was installed in the chaincase, providing a gear reduction of 2.05. This gear combination was chosen to improve acceleration and engine efficiency at cruising speed versus the 2.19 ratio used in the stock FS chaincase.

To reduce friction in the engine and idler wheel bearings, the team utilized a proprietary WS2 micro-coating applied by Micro Surface Corporation of Morris, Illinois. The dry coating lubricant consists of modified tungsten disulfide. This coating has a coefficient of friction of .030, about half that of Teflon. The coating molecularly bonds to the substrate material creating a surface that promotes release.



Figure 5: Picture of the disassembled engine components prior to the anti-friction coating process.

The dry coating lubricant consists of modified tungsten disulfide. This coating has a coefficient of friction of .030, about half that of Teflon. The coating molecularly bonds to the substrate material creating a surface that promotes release. A surface coated with tungsten disulfide has a hardness of Rockwell 30, thereby increasing wear life in bearing surfaces and gears by 200%. The coating is very temperature resistant and only adds about 0.5 microns to the substrate surface [9].

Another improvement made to the powertrain to enhance efficiency was to machine the driveshaft paddles into true circles. The team purchased a hollow, light weight driveshaft to reduce weight. Like most drive shafts purchased, this one came with plastic molded drive paddles that were un-machined. The molding process of these drive paddles do not create a very uniform shape, which can cause a snowmobile's track to change tension while moving. This effect of relaxing and tensioning of the track can make the snowmobile less efficient as well as increase snowmobile noise and wear. To reduce these effects, the driveshaft was machined on a lathe so that both drive paddles were symmetrical in shape.

Control Hardware

Since Bosch would not supply the tools to reprogram the stock FS engine controller to operate on E85, Wisconsin is utilizing a Motorola MPC555 Powertrain Control Module (PCM) embedded system that is specifically designed for automotive applications. The PCM, which utilizes an operating system developed by MotoTron, is hermetically sealed and suitable for the under-hood environment. It can withstand temperatures from -40°C to 130°C, acceleration up to 18G and submersion in water to a depth of 3 m. It has 32 analog inputs, 6 digital inputs, 20 low side driver power outputs, 8 logic level outputs and a dual 2.0B CAN interface.



Figure 6: Picture of the Motorola MPC555 powertrain control module.

The base control strategy was supplied by Mototron and its Motohawk software auto-code generates the control code from this Simulink model. The Mototron model was modified for this particular application and has spark and fueling tables that are load and speed dependent. In addition, the model has adaptation for atmospheric conditions and cold starts. Finally, the model estimates fuel rates using a global air-fuel ratio so that switching from gasoline to ethanol is seamless.

Fuel System Modifications

In order to run E85, modifications to the fuel delivery system were necessary. Because of ethanol's corrosive properties, the team upgraded all fuel system components to an ethanol compatible material. Ethanol fuel has lower energy per volume than gasoline, so the fuel injectors must be changed to accommodate the need for increased fuel flow. Wisconsin identified a split-port, 6-nozzle Bosch fuel injector that was capable of delivering nearly twice the fuel delivery rate. The injector specifications are given in Table 3.

Table 3: Injector Specifications.

	Gasoline Injector	Ethanol Injector
Bosch Part #	0 280 156 236	0 280 156 290
Body Color	Yellow	Black
60 Sec Flow	213 g	400 g
Impulse Flow	6.3 mg	11.2 mg
Impulse Time	2.5 ms	2.5 ms
Rail Pressure	300 kPa	300 kPa
Driver Stage	SEFI	SEFI

Another effect of increased fuel flow is that a larger fuel filter is needed. The team decided to use an inline 35 micron sintered bronze fuel filter capable of delivering fuel at five gallons per minute.

Calibration

Using a water-brake dynamometer, a non-dispersive infrared CO meter, a HEGO O₂ sensor, a chemiluminescent NO_x analyzer and exhaust thermocouple probes, Wisconsin systematically optimized the engine. The CO meter was used to verify that both cylinders were operating at the same stoichiometric mixture in addition to verifying the O₂ sensor. The fuel mixture was adjusted to stoichiometric while the spark timing was advanced to balance engine torque and engine-out NO_x levels.



Figure 7: Picture of the students huddling around an oscilloscope calibrating the new E85 injectors.

EMISSIONS

Knowing that the untreated emissions of the FS engine are significantly higher than the CO, HC, and NO_x figures of past CSC winners, the Wisconsin team's first step in reducing emissions was the addition of catalytic after-treatment. Because the CSC emissions scoring is based on a combination of HC, CO and NO_x levels, a three-way, platinum-based catalyst was chosen for its ability to effectively reduce all three pollutants. W.C. Heraeus GmbH supplied custom 3-way catalyst (Table 4) for this engine's operating conditions.

Table 4: Catalyst Specifications.

Manufacturer	W.C Heraeus GmbH
Diameter	60mm
Length	75mm
Substrate	Metal Honeycomb
Density	400 cpsi (cells per square inch)
Loading	Platinum 7.4 g/ft ³ Palladium 37.0 g/ft ³ Rhodium 5.6 g/ft ³

To optimize reduction of CO, HC and NO_x, the exhaust gases entering the three-way catalyst must alternate between slightly rich and slightly lean. As seen in Figure 7, the catalytic reduction efficiency for NO_x at a stoichiometric air-fuel ratio is slightly under 80%, while HC and CO are reduced at almost 90% efficiency. When a lean exhaust mixture passes through the catalytic converter, excess NO_x is absorbed on the

surface of the substrate while the CO and HC are reduced to H₂O and CO₂ in the presence of excess oxygen. In contrast, when a fuel-rich exhaust mixture goes through the catalyst, the NO_x is released from the substrate and reacts with the HC and CO to form N₂ and CO₂ and/or H₂O. The Mototron's closed-loop fuel injection code incorporates this oscillation between lean and rich operation for maximum emission reduction.

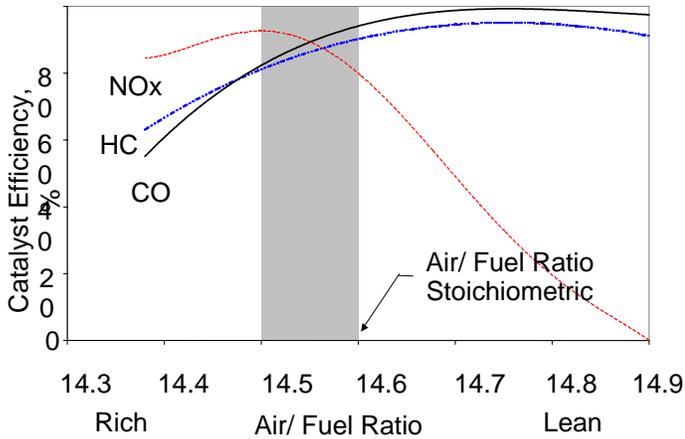


Figure 8: The NO_x, CO, and HC conversion efficiency for a three-way catalytic converter as a function of exhaust gas air/fuel ratio operating on gasoline (Adapted from [10]).

Due to packaging constraints, two smaller diameter catalysts were used in series in leau of one larger diameter brick. Extensive emissions testing using a Fourier Transform Infrared (FTIR) three-gas analyzer was used to test the FS engine operating on gasoline. The operating conditions of the engine during emissions testing are listed in Table 5.

Table 5: Engine operating characteristics when performing the five-mode emissions test used for the CSC [11].

	Engine Speed (rpm)	Torque (N-m)	Power (kW)
Mode 1 (WOT)	8000	54.9	46.0
Mode 2 (85%)	6800	28.0	19.9
Mode 3 (75%)	6000	18.1	11.4
Mode 4 (65%)	5200	10.7	5.8
Mode 5 (idle)	1700	1.4	0.2

Testing on the sled showed that the dual-catalyst system yielded a reduction in the average specific mass emissions (HC+NO_x) from an untreated 8.80 g/kW-hr to 0.89 g/kW-hr, a 90% improvement. Due to a delay in the delivery of the fuel system components for ethanol operation, emission results for ethanol operation were not available but the reduction percentage should be similar. Figure 10 shows the final results of the emissions testing on the Bucky Classic 750 after full optimization of the emissions reduction systems.

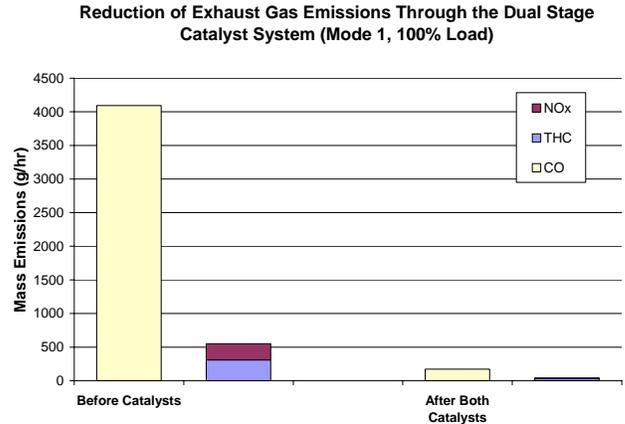


Figure 9: The dual-catalyst system yielded a 95% reduction in CO and NO_x and a 90% reduction in THC over the FS engine's base emissions at 100% load.

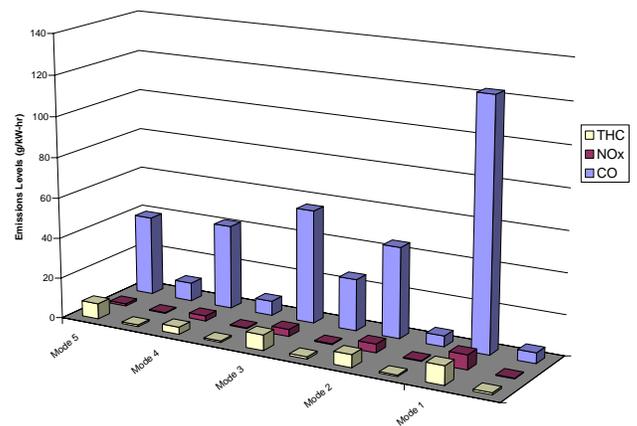


Figure 10: Emissions reduction for the FS engine operating on gasoline. The raw engine emissions are on the left side of each mode.

Evaporative Emissions

The Bucky Classic 750 features a charcoal evaporative emissions canister (shown in Figure 11) to reduce hydrocarbon emissions due to thermal cycling of the fuel tank. This canister captures harmful vapors released from the tank when the snowmobile is not in use and

releases them into the air box during engine operation where they are combusted. These canisters have been used on vehicles since the late 1960s and have been required on all on-road vehicles manufactured since 1971.



Figure 11: The evaporative emissions system on the Bucky Classic 750 reduces hydrocarbon emissions due to thermal cycling of vapors in the fuel tank, a major source of unburned hydrocarbon emissions.

NOISE

Wisconsin’s primary goal for sound reduction on the Bucky Classic 750 was to reduce A-weighted sound pass-by levels below those of the current standard set by the International Snowmobile Manufacturers Association (ISMA), which is 78 dbA using SAE test procedure J192. A secondary goal was to reduce perceived sound levels to bystanders. Table 6 shows the A-weighted pass-by levels for the stock Polaris Frontier platform that the Bucky Classic 750 is based on. Additionally shown are the sound emissions from a 2002 Arctic Cat 660 four-stroke and the average for two-stroke machines.

Table 6: A comparison of noise emissions from various over-snow vehicles. Measurements are on the A-weighted dB scale and based on pass-by testing at 15.24 m (50 ft). Derived from data in [12].

	33 km/hr	50 km/hr	58 km/hr	75 km/hr	WOT	Idle
2002 Arctic Cat 660	65.8	---	72.0	72.3	71.6	42.1
2002 Polaris Frontier	65.6	---	71.2	72.6	74.0	51.4
Two-Stroke Snowmobile Average	70.7	---	73.9	75.3	78.7	55.4

Muffler Design

As a starting point, redesigning the FS exhaust system offered the most potential for noise reduction. Wisconsin’s emission strategy required the addition of several catalysts. The relocation of the oil reservoir versus the 2006 Wisconsin CSC entry created under hood space that could be utilized for a new, quieter exhaust system.

While more room is available for 2007 than 2006, space was still limited by packaging constraints on the right side of the snowmobile, so students designed a two-stage exhaust system that takes advantage of the open space in front the engine. The 2007 Wisconsin CSC catalyst system improves upon the 2006 system through the addition of dual catalyst passages as compared to the 2006 single passageway. This change will effectively double the dwell time of exhaust inside the catalysts, and reduce emissions. To maximize catalyst temperature, the four catalysts are mounted inside the first muffler, locating them only 30-40 cm downstream of the engine exhaust manifold. The catalysts are 60 mm in diameter and 74.5 mm long with 400 cells per square inch. The substrate is loaded at 50 g/ft³ using a 4/20/3 platinum, palladium, and rhodium ratio.

Figure 12 shows a schematic drawing of the catalyst expansion chamber. Exhaust flow from the engine headers enters into the first chamber where it expands and mixes to achieve even gas flow through the catalysts. After passing through the first catalyst stage, the exhaust gases remix and flow through an identical second stage catalyst set.

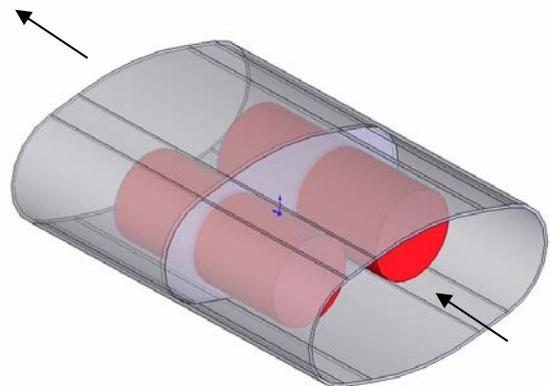


Figure 12: Solidworks model of a catalyst expansion chamber.

After passing through the catalyst chamber, the exhaust flow enters a high frequency diffuser (Figure 13) designed to remove the majority of mid to high frequency noise. After exiting this chamber, the exhaust

is directed into a stock Arctic Cat 660 four stroke muffler. The Arctic Cat muffler was selected after extensive testing on several different muffler designs, including the stock FS muffler and Wisconsin's previous muffler designs. The Arctic Cat muffler was found to provide the best sound attenuation over the engine rpm ranges that the snowmobile will be operated over. As well as reduce weight by seven pounds over the stock FS exhaust.

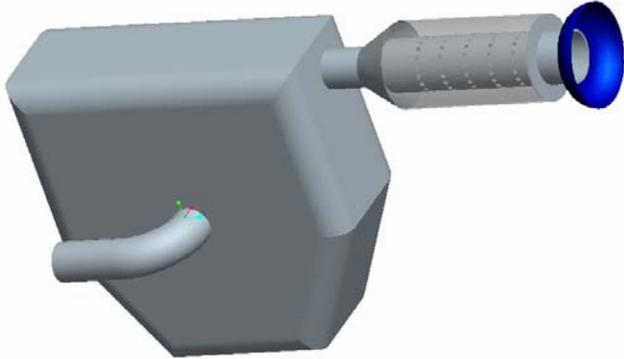


Figure 13: The second stage of the muffler system is consists of a high frequency diffuser inline with an Arctic Cat box muffler.

Mechanical Noise Reduction

With the redesigned muffler virtually eliminating exhaust noise, the team focused on mechanical noise emitted from the snowmobile. In order to identify the main contributors of the sound from the snowmobile, pass-by sound testing was performed.

To quantify noise levels, Wisconsin performed various different sound tests including drive-bys at constant speed and during WOT acceleration. The protocol for the WOT tests was an entry at 24 km/hr with a transition to wide-open throttle at a point 22.5 m before the plane of the microphones (speed at the point crossing the plane of the microphones was 69 km/hr). Sound measurements were taken in a variety of snowmobile configurations (described below), to best determine the major source of noise. In addition to the pass-by testing, the team did a spectral noise analysis, using dual microphones at a distance of 15 m on several 72 km/hr pass-by tests. This data was recorded using a Hi-Techniques HT-600 data acquisition system, allowing a thorough analysis of sound emissions.

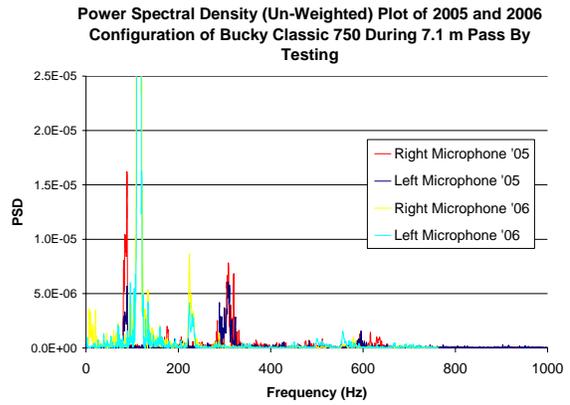


Figure 14: Spectral sound density of UW-Madison 2005 and 2006 CSC entries. Testing was performed Feb 25, 2005 and March 1, 2006.

Figure 14 shows a Power Spectral Density plot from the Bucky Classic 750 for the previous two years. This plot shows the sound power emitted from the sled as a function of frequency. Three distinct peaks can be seen near 100, 225, 300, and 600 Hertz. By calculating the first and second order contributions of the snowmobile components at 72 km/hr (Table 6), the sources of the peaks were discovered. The 100 Hz peak is first order engine noise, the 225 Hz peak is second order engine noise, and the 300 and 600 Hz peaks are first and second order noise produced where the track paddles interface the track. The right side 100 Hz and 225 Hz peak is much higher than the left side because the exhaust outlet is on the right side of the snowmobile. The 2006 results are still valid as the engine and tunnel have not been modified, only the muffler.

Table 7: First and second order frequencies of sound emitted by three components of interest on the Bucky Classic 750.

	1st Order Frequency (Hz)	2nd Order Frequency (Hz)
Engine	100	225
Track-Paddle Interface	303	606
Chain Case	1345	2690

The 300 Hz and 600 Hz track sound power for the 2006 Bucky Classic 750 nearly negligible compared to the sound power produced by the 2005 snowmobile. This reduction is due to the incorporation of an Arctic Cat silent track in place of the stock Polaris track, and the installation of a drive paddle sound dampening device on the front suspension arm.



Figure 15: Arctic Cat Silent Track installed in the Bucky Classic 750.

The Arctic Cat silent track has small opposing ramps placed on the inner surface near the outside edge of the track. These ramps compensate for flex in the track due to the lug spacing, creating an even radius of curvature as the track bends. This allows the track to move smoothly over the front and rear idlers, reducing track friction, vibration and noise.

Another addition to the sound dampening package on the Bucky Classic 750 is the drive paddle noise dampener located on the front arm of the rear suspension (shown in Figure 16).



Figure 16: Drive paddle sound dampener installed on front suspension arm.

The drive paddle sound dampener isolates the sound produced by the drive paddles contacting the drive lugs on the track. This contact noise was seen as a peak at 300 Hz in the 2005 test data. As the 2006 data shows

(Figure 14), this 300 Hz peak has been reduced to nearly zero.

The relative contributions of the engine and track noise are difficult to ascertain from this graph because the data is not A-weighted. Therefore, more pass-by tests were performed to determine the relative contributions of the engine and track noise.

Pass-by tests were performed in the same manner described earlier with thick rubber mats placed over portions of the snowmobile to isolate that area's sound emissions. A rubber cover was made for the hood and a rubber skirt was made for the track. Figure 17 shows these sound barriers installed on the snowmobile.



Figure 17: Rubber mats were used to isolate sound emissions from targeted components. In this way, the relative contribution of each component to the overall A-weighted sound level could be found.

The rubber covers allowed the isolation of specific snowmobile components, and the team was able to discover the relative contributions of the track and engine to overall sound emissions of the snowmobile. Figure 18 shows the results of the testing. Variables tested include isolating the hood, isolating the track, isolating both the hood and track, and comparison of the 2006 exhaust with the new 2007 exhaust.

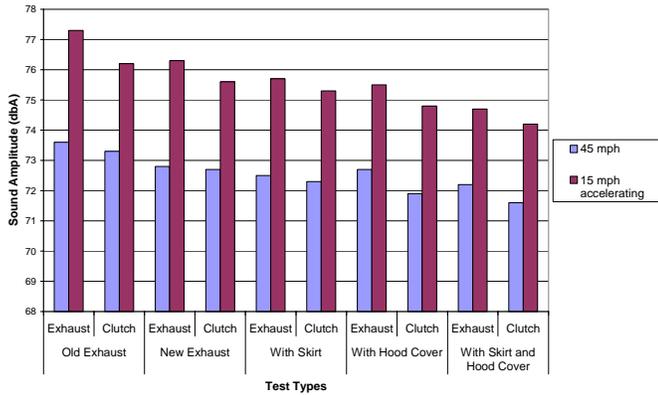


Figure 18: Graphs of pass-by sound testing results. The 2007 exhaust is about 1 db quieter than 2006.

Based upon the results of Wisconsin’s pass-by testing in 2007, the Bucky Classic 750’s exhaust is significantly quieter than the 2006 exhaust system. Isolating individual components of the snowmobile, such as the track or the engine bay, also reduced sound levels. The reductions that were achieved by using the rubber mats could not be fully realized on the final design, as the amount of added weight would have been unacceptable.

In an effort to change the resonance frequency of the tunnel, the team decided to add tunnel-stiffening angle brackets to the sides of the tunnel near the foot wells (Figure 20).

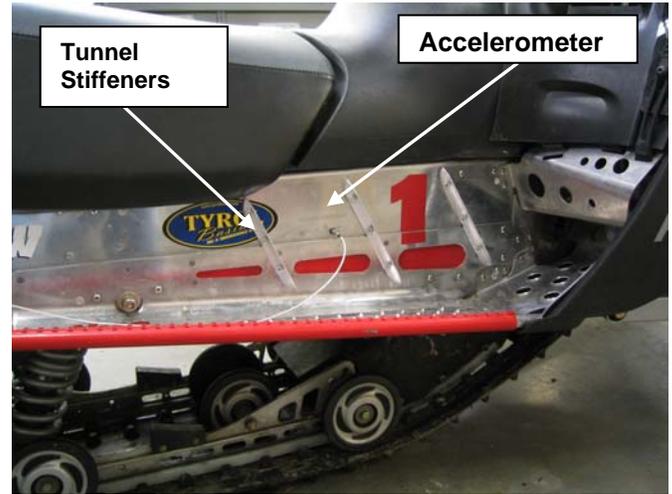


Figure 20: Tunnel stiffening angle brackets with accelerometer attached.

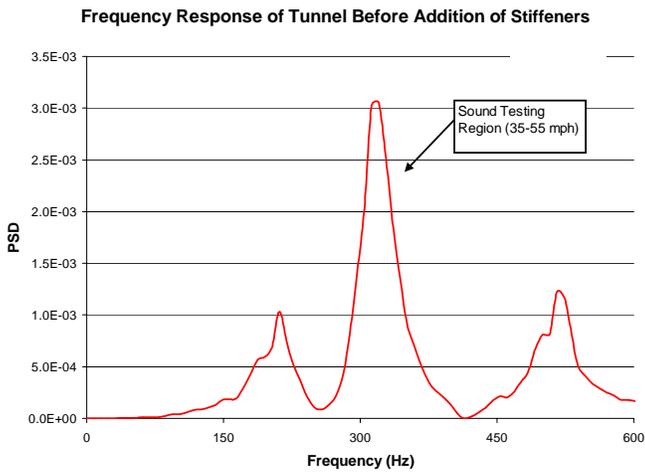


Figure 19: Frequency response of tunnel before adding tunnel stiffeners.

In addition to the mechanical sound reducing enhancements outlined above, the UW-Madison team decided to investigate the resonant frequency of the tunnel, looking for a possible track-tunnel sound amplification. Using a Hi-Techniques data acquisition system and PCB Piezoelectric accelerometer, the team discovered that the tunnel had a resonant frequency that matched the 300 Hz track vibration (Figure 19). This meant that any vibration from the track was being amplified by the tunnel, greatly increasing noise.

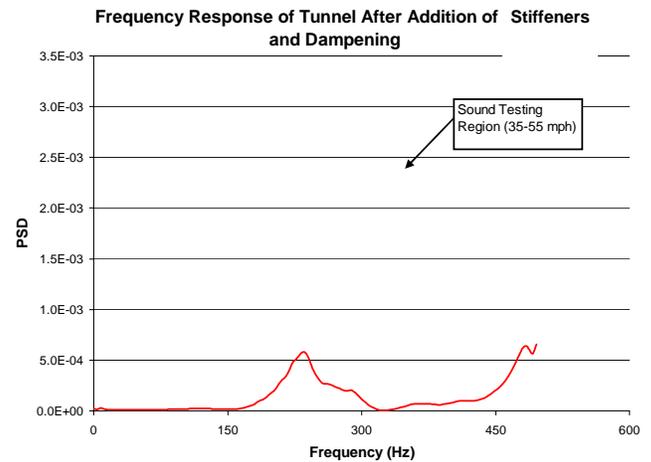


Figure 21: Frequency response of the tunnel after adding tunnel stiffeners.

The frequency response graph in Figure 21 clearly shows the elimination of the 300 Hz natural frequency of the tunnel through the use of the tunnel stiffeners. This change in the natural frequency effectively removed any amplification of track noise through the resonating tunnel, greatly reducing perceived track noise. This modification helped the team reduce sound power produced by the track and suspension in the Bucky Classic 750 over 69% compared to earlier Wisconsin CSC entries.

OTHER SNOWMOBILE INFORMATION

The base chassis for the Bucky Classic 750 is a 2003 Polaris EDGE sold with a Liberty 784 cc engine under the name Frontier Classic. Selected for its versatility, the EDGE chassis offers a variety of suspension and ride adjustments for different performance needs. The EDGE chassis provided a cost-effective base from which Wisconsin could implement modified powertrain.

LED Headlight Assembly



Figure 22: Dual LED headlight assembly before installation.

To reduce the overall electric load on the engine, the team decided to design and install light emitting diode (LED) headlights. LEDs are much more energy efficient than the stock incandescent bulbs while maintaining the required 200 foot visibility limit as required by the Wisconsin Department of Natural Resources [13]. The states of Michigan and Minnesota do not have distance visibility requirements for snowmobile headlights. The headlight assembly consists of two 6 volt, 3 watt LEDs connected in series combination to the wiring harness, making a total electrical load of 6 watts. The stock incandescent bulbs use 97 watts of power at low beam. Therefore, using the LEDs results in a power savings of 91 watts.

Polycarbonate Hood

The Bucky Classic 750 employs a lightweight polycarbonate hood shell. This un-vented shell lowers noise transmission, reduced vehicle weight, and increases durability compared to a stock hood. The clutch cover and underside of the hood have been lined with Polydamp Melamine for noise reduction. This polymer was selected for its sound absorption peak at frequencies between 100-350 Hz, maximizing the reduction of engine and clutch mechanical noise and speeds above 75 km/hr. The foam is rated for

temperatures up to 400°C, making it safe for use in the engine bay.

Starter Battery

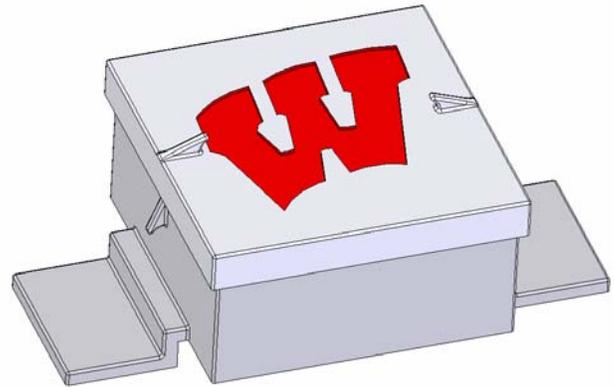


Figure 23: Image of the Solidworks model of battery box assembly.

In order to increase the amount of space under the hood, the team decided to move the battery box under the seat. The battery box was designed and modeled in Solidworks, and constructed of ABS plastic utilizing a rapid prototyping process. The box is designed to fit the stock Polaris battery.

Suspension Improvements

The rear suspension is a modified M-10, featured on multiple Polaris models. This suspension provides optimum rider comfort and performance that is sought by consumers.



Figure 24: Picture of the lightweight front suspension being utilized by Wisconsin.

The team decided to modify the front suspension of the 2007 CSC entry in order to reduce weight as much as possible. Consideration was given to a student designed and built suspension, but safety concerns led the team to install a professionally designed and built lightweight front end kit manufactured by Timbersled products. The front end kit reduces the suspension weight by 12 pounds, much of which is unsprung weight. This reduction in unsprung weight allows the suspension to be more responsive to rough terrain. The stock steel radius rods are replaced with aluminum, and the spindle is greatly redesigned with reducing weight as a priority. The suspension allows for a 10 degree sharper steering angle while maintaining a near stock ski stance and sway bar for optimal stability while cornering.

COST ESTIMATES

To help the Wisconsin team determine an acceptable manufacturer's suggested retail price (MSRP), 60 snowmobilers were surveyed at the 2006 World Championship Snowmobile Derby in Eagle River, WI. The individuals indicated the maximum surcharge that they would be willing to pay for a snowmobile utilizing clean and quiet technologies. The results are given in Figure 25.

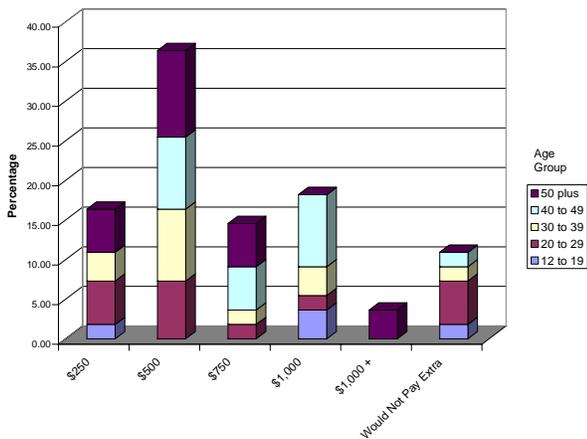


Figure 25: A survey of 60 snowmobilers shows that an added cost of \$500 for clean and quiet technologies will be acceptable to most consumers.

Every component of the Bucky Classic 750 is designed for manufacturability. Many of the technologies are currently in use in other transportation applications. The values listed in the cost summary of Table 8 are based on the assumption that parts are either manufactured in production quantities of at least 5000, plus 50% (Per 2007 CSC Rules).

Table 8: Projected MSRP of the Bucky 800 HD

Item	UW-Madison Bucky Classic 750	2003 Polaris Frontier Classic
2003 Frontier Classic	\$5,899	\$5,899
Sled Modifications	~\$5,190	None
FS Engine	~\$3,000	None
Engine Coating	\$142	None
Catalysts (4)	\$238	None
Total	\$14,469	\$5,899

CONCLUSION

The 2007 University of Wisconsin – Madison Clean Snowmobile Challenge entry drastically improves upon the best available technology in performance and emissions standards for over-snow recreational vehicles. Taking into consideration consumer performance requirements for an environmentally friendly snowmobile, the team engineered and installed a new, powerful four-stroke powerplant that combined satisfying performance with EPA 2012 emissions. A custom exhaust with quad three-way catalysts reduces air pollutants to levels well ahead of current and future EPA requirements. The redesigned drivetrain and exhaust after-treatment system ensure that Wisconsin's sled does not damage the environment it tours. Designed for manufacturability and aesthetically pleasing packaging, the Bucky Classic 750 is a cost-effective solution for performance-oriented riders seeking a cleaner, quieter snowmobile.

ACKNOWLEDGMENTS

The University of Wisconsin Clean Snowmobile team gratefully acknowledges the support of the College of Engineering and specifically the other UW vehicle projects. The team also thanks its many sponsors, especially Polaris Industries, for their extensive support. The Wisconsin team would also like to thank Nelson Industries, Ford Motor Company, and the Kohler Company, whose financial commitment to student design programs insured the success of this project. Additionally, the team wishes to thank PCB Piezotronics for the donation of sound equipment vital in the testing and reduction of sound emissions from the Bucky Classic 750.

The team would also like to thank their advisor, Dr. Glenn R. Bower. Without his machining expertise, commitment of time, enthusiasm and willingness to teach, this project would not have been possible.

REFERENCES

1. "Riders' Demand Cleaner, More Efficient, Smoother Riding Snowmobiles – Polaris Delivers." SnowGoer Canada. <http://www.snowgoercanada.com/news/news.asp?ArticleID=91> (Website accessed 3/1/2007)
2. Lela, C., White, J., Haines, H., and Sacklin, J. "Laboratory Testing of Snowmobile Emissions: Southwest Research Institute." Report number SwRI 08.05486. July 2002. Montana Department of Environmental Quality, Helena, Montana, and National Park Service, Yellowstone National Park, Wyoming.
3. "SDI-SDI." Bombardier Recreational Products. http://www.ski-doo.com/media/2004_SOTY.pdf (Website accessed 3/1/2004)
4. Bauer, T., Boyarski, N., Mauermann, F., *et al.*, "A Clean, Quiet, Safe, High-Performance Snowmobile." March 2003. SAE Clean Snowmobile Challenge Technical Paper, University of Wisconsin – Madison.
5. Cameron, Kevin. "Parallel Paths" SnowTech Magazine. <http://www.snowtechmagazine.com/articles/parrallel.html> (Website accessed 3/1/2004)
6. Polaris Snowmobiles with Efficient New 4-stroke Engine Approved for Riding in Yellowstone. <http://www.theautochannel.com/news/2005/12/29/197691.html> (Website accessed 2/25/2006)
7. "What's Your Ride?" SnowGoer Magazine. <http://www.snowgoer.com/output.cfm?id=1053127> (Website accessed 2/28/06)
8. FS Touring Specifications. <http://www.polarisindustries.com/enus/Snowmobiles/2006Models/TwoUpTouring/FStouring/> (Website accessed 2/25/06)
9. Micro Surface Corporation. "WS2 Coatings." 10/14/2004
10. Heywood, J.B. "Internal Combustion Engine Fundamentals." McGraw Hill, Inc 1988.
11. 2007 SAE Clean Snowmobile Challenge Rules. <http://www.sae.org/students/cscrules.pdf> (Website accessed 2/27/2007)
12. Daily, John. "Supplemental Over-Snow Vehicle Sound Level Measurements." Conducted for the Winter Use Plan Supplemental Environmental Impact Statement. Prepared for State of Wyoming. February 2002.
13. "Wisconsin Snowmobile Laws." Wisconsin Department of Natural Resources. <http://www.dnr.state.wi.us/org/es/enforcement/DOC/S/SnomoRegs04.pdf> (Website accessed 2/27/2007)