

Designing a Quiet, Ultra Low Emissions, Turbocharged Performance Four Stroke Flex Fuel Snowmobile

Nicholas J. Rakovec, Brad Hall,
Glenn R. Bower, Ethan K. Brodsky
University of Wisconsin-Madison

ABSTRACT

The University of Wisconsin-Madison Snowmobile Team has designed and constructed a clean and quiet, high performance snowmobile for entry in the 2009 Society of Automotive Engineers' Clean Snowmobile Challenge. Built on a 2007 Polaris FST LX trail chassis, this machine features a 750 cc port fuel-injected turbocharged four-stroke engine equipped with a fuel sensor which allows operation ranging from regular gasoline to an 85% blend of ethanol and gasoline (E85). The engine has been customized with a Mototron control system which allows for full engine optimization using a range of fuels from E0 to E85. An electronic throttle body and dual mass air flow sensors allow for accurate calibrations for all gasoline/ethanol blended fuels. Utilizing a heated oxygen sensor and a 3-way catalyst customized for this engine by W.C. Heraeus-GmbH, this sled reduces NO_x, HC and CO emissions by up to 91% to an average specific mass of 0.55, 0.12, 5.61 g/kW-hr respectively. Utilizing a specialized camshaft with low valve overlap, Wisconsin reduced both engine-out emissions and fuel consumption by approximately 10%. With all of the modifications, the clean turbocharged MPE 750 is capable of a power output of 61 kW and utilizes a custom catalytic muffler system to reduce sound levels to 71 dbA using SAE test procedure J192. The entire engine and muffler system is packaged in a manner that maintains the snowmobile's aggressive OEM appearance.

INTRODUCTION

The Society of Automotive Engineers (SAE) developed the "Clean Snowmobile Challenge" (CSC) in 2000 when snowmobiles were banned from National Parks. It is an engineering design competition among colleges and universities that demonstrates clean, quiet and practical alternatives to the conventional two-stroke snowmobile. Competition entries are redesigned versions of original equipment manufacturer (OEM) snowmobiles and are expected to significantly reduce unburned hydrocarbons, carbon monoxide, nitrous oxide, and noise emissions while maintaining a consumer acceptable level of performance. Successful CSC entries must also demonstrate reliability, efficiency, and cost

effectiveness. The 2009 CSC will be held in Michigan's Keweenaw Peninsula from March 16-21st.

The following paper discusses how the University of Wisconsin – Madison team has engineered an entry for the 2009 CSC that improves upon the industry's best available emissions and sound technology, while maintaining exceptional riding characteristics. The first section addresses the engine selection process and modifications to the snowmobile's drivetrain. The second section describes the fuel system modifications necessary for flex fuel capability. The third section focuses on emissions and emissions reduction techniques. The next section discusses specific design enhancements that reduce overall snowmobile noise. Finally, the paper addresses general snowmobile modifications employed to enhance the previously mentioned technologies. In addition, the paper summarizes the implementation costs compared to a comparable production snowmobile.

MARKET SURVEY

The guiding principles for the 2009 UW-Madison clean snowmobile design are simplicity and practicality: the design objective is to win the Clean Snowmobile Challenge with a snowmobile that is not only clean and quiet, but maintains the speed and handling characteristics that consumers expect from a modern snowmobile. In order to market a product to current snowmobile consumers, the team first determined the characteristics which are important in this demographic sector.

In 2008, the team attended the World Championship Snowmobile Derby in Eagle River, Wisconsin. While exhibiting the 2008 CSC entry, the team surveyed 115 attendees with the goal of determining the performance requirements of the average consumer. The survey asked volunteers to rank several characteristics that are important to a consumer when buying a snowmobile from the following list: acceleration, handling, price, fuel economy, and emissions. The results, as seen in Figure 1, show that acceleration, trail handling, and price influence a buyer significantly more than fuel economy or emissions.

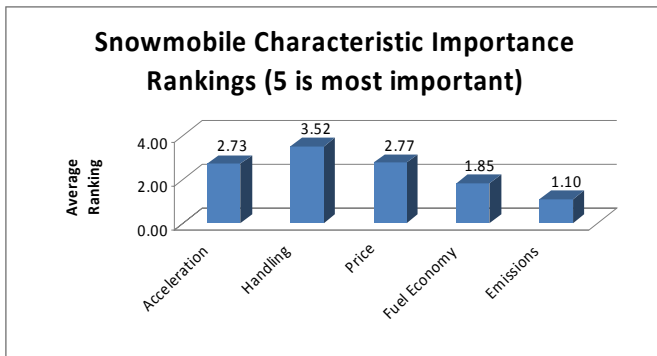


Figure 1: A survey of 115 snowmobilers taken at the 2008 Eagle River Ice Derby shows that acceleration, price, and handling are the most important considerations when purchasing a snowmobile.

The survey results confirm the guiding principles of the Madison Clean Snowmobile Team. Across every age group, snowmobilers will not accept an environmentally friendly snowmobile if it does not exhibit acceptable acceleration and handling performance.

To more broadly confirm the survey results, the team checked the industry sales numbers for the 2006 model year. The manufacturer with the highest market share, Bombardier Recreational Product's Ski-Doo line, exclusively builds lightweight high performance two strokes that demonstrate excellent acceleration and handling characteristics. Also, the best selling single model from 2006, Polaris' 600 HO I.Q., has excellent handling and acceleration [1]. These results clearly fall in line with the data collected in the consumer survey.

ENGINE OPTION EVALUATION

Given the market survey results demanding a snowmobile with excellent acceleration and handling, the team searched for engines with good power-to-weight ratios. Engines were considered on a basis of hydrocarbon (HC), carbon monoxide (CO), and nitrogen oxide (NO_x) emissions, power-to-weight ratio, cost, and ease of implementation. To match the design to CSC competition objectives, emissions and power-to-weight ratios were equally weighted, followed sequentially by ease of implementation and cost. The following engine options were considered by the team:

- Two-stroke (conventional) snowmobile engines
- Semi-direct injection (SDI) snowmobile two-strokes
- Four-stroke snowmobile engines
- Turbo-charged four-stroke snowmobile engines
- Direct injection (DI) two-stroke marine engines

- Four-stroke personal watercraft (marine) engines
- Compression ignition (CI) engines

The choice between current snowmobile engine technologies is fairly straightforward. Conventional and SDI two-strokes have significantly higher power-to-weight ratios than current snowmobile four-strokes. However, snowmobile emissions testing conducted by Southwest Research Institute (SwRI) clearly states that commercially available four-strokes "...emit 98-95 percent less HC, 85 percent less CO, and 90-96 percent less PM" than conventional two-stroke snowmobile engines [2]. Though four-strokes have significantly higher NO_x than two-strokes, the study notes that the use of a catalyst system on a four-stroke can nearly eliminate NO_x, while further reducing HC and CO.

While the SwRI study did not evaluate SDI two-stroke technology, current publications from Bombardier Recreational Products, the developer of SDI technology, suggests that the system improves emissions only 50% over conventional two-strokes [3]. While SDI engines are a significant improvement compared to conventional two-strokes, they cannot attain current four-stroke emission levels and the SDI injectors have not been design validated for E85 operation. Aside from the three pollutants measured for competition scoring, two-stroke spark ignition engines are known emitters of benzene, 1,3-butadiene and gas-phase and particle-phase polycyclic aromatic hydrocarbons, all of which are classified as known or probable carcinogens by the U.S. Environmental Protection Agency (EPA) [4].

The team evaluated compression ignition (CI) engines, recognizing their excellent HC and CO emissions. However, CI engines were eliminated from consideration due to their poor power to weight ratio and cold start limitations. Similarly, the marine engine options were eliminated because of their low power to displacement ratios. CSC rules restrict four-stroke displacement to 960 cc and current marine outputs in this range produce only 40-50 hp. At these power levels, four-stroke engines designed for snowmobiles and ATVs offer far easier implementations. The difficulty of adapting a four-stroke motorcycle V-twin engine to a snowmobile CVT eliminated this option.

To aid in our engine selection, the Eagle River survey also had volunteers choose the powertrain option they would most likely buy between a semi-direct injection two-stroke, a port-injected four stroke, or a zero emissions electric. As seen in Figure 2, almost 50 percent of the voters claimed they would choose a four stroke engine to power their snowmobile.

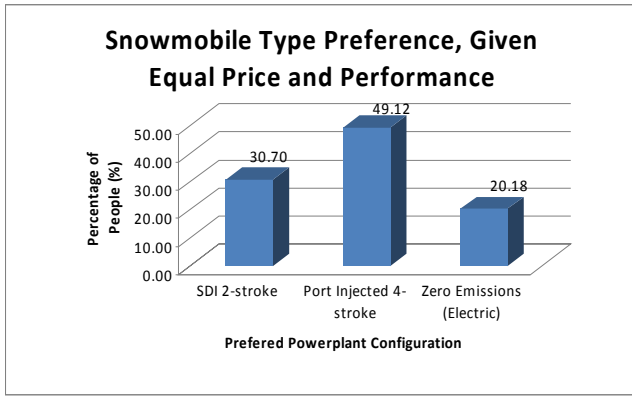


Figure 2: Results from the 2008 Eagle River survey showing people would prefer a four stroke engine in their snowmobile.

FINAL ENGINE SELECTION

Given the heavy weighting on emissions in CSC competition scoring, the team determined that a commercially available snowmobile or high-compression motorcycle four-stroke engine offered the most potential. Commercially available turbocharged versions of the FS and 660 are capable of power output close to that of motorcycle engines (100+ kW). To compare the emissions of different engines, the UW team examined a SwRI study which compared conventional two-stroke snowmobile emissions to that of the Arctic Cat 660 and the Polaris Liberty. As seen in Table 1 the un-catalyzed four-stroke engines slightly increase NO_x emissions while significantly reducing HC and CO emissions.

Table 1: Emissions Data from a SwRI Study [2].

	HC g/kW-hr	CO g/kW-hr	NO _x g/kW-hr
Two-stroke average	189	517	0.72
Arctic Cat 660 (4s)	6.2	79.9	10.6
Polaris Liberty (4s)	3.2	79.1	7.0

High-performance turbocharged snowmobile engines such as the Polaris FST and Arctic Cat 660T almost double the power output of the base engine but at a penalty of increased emissions, fuel economy and cost. While the non-turbocharged FS engine is EPA 2012 emissions certified, the FST is not [5]. Studying the CSC competition results from 2006 and 2007, the naturally aspirated FS engine consistently achieves a 9% increase in fuel economy when compared to the Polaris

FST engine. However, new technologies are making it easier to create a clean, fuel efficient and yet powerful turbocharged engine.

Given the CSC core objectives of clean, quiet, and powerful the team chose to use the Weber AG 750 cc turbocharged four stroke recreational engine retrofit with a custom camshaft with reduced valve overlap. This creates a higher effective compression ratio which increases in-cylinder temperatures and engine-out NO_x emissions. The reduced valve overlap also reduces the engine's peak engine speed from 8500 rpm to 6500 rpm with a corresponding decrease in peak power from 100 kW to 61 kW which is 20 kW higher than the high-speed naturally aspirated engine. The reduced valve overlap ultimately increases fuel efficiency while reducing engine-out CO and HC emissions.

Testing by Weber AG shows that retarding ignition timing by 15 degrees significantly reduces HC and NO_x emissions by reducing combustion temperatures and allowing continued reactions in the manifold and turbine [6]. The 3K-Warner turbocharger can produce up to 2000 mbar of boost. Transient response is improved with the following features:

- Pulse charging with 360° crank angle
- Volume-minimized exhaust system
- Reduced duct lengths and volume on intake
- Use of a small turbine

On a production engine, full boost can be achieved in 1.15 s. This combination provides plenty of power to satisfy the performance demands of the snowmobile enthusiast, while maintaining low emissions required by law. The engine also implements a short stroke, single camshaft with rocker arms, 20° valve angle and dry sump lubrication for a minimal build height of 455 mm, similar to a typical two stroke engine [6].

Table 2: Polaris FST Engine Specifications [6]

Engine Type	Four Stroke
Cooling	Liquid
Cylinders	2
Displacement	750 cc
Bore x Stroke (mm)	85 x 66
Ignition	Bosch
Exhaust	Single
Fueling	EFI
Compression Ratio	9:1

CONTROL HARDWARE

Since Bosch would not supply the tools to reprogram the stock FST engine controller to operate on E85,

Wisconsin is utilizing a Motorola MPC555 Powertrain Control Module (PCM) embedded system that is specifically designed for automotive applications. The PCM, which utilizes an operating system developed by MotoTron, is hermetically sealed and suitable for the under-hood environment. It can withstand temperatures from -40°C to 130°C , vibrations up to 18G and submersion in water to a depth of 3 m. It has 32 analog inputs, 6 digital inputs, 20 low side driver power outputs, 8 logic level outputs and a dual 2.0B CAN interface.



Figure 3: Picture of the Motorola MPC555 powertrain control module which is used as the engine control module in the Bucky CFS.

The base control strategy was supplied by Mototron and its Motohawk software auto-code generates the control code from this Simulink model. The Mototron model was modified for this particular application and has spark and fueling tables that are load and speed dependent. In addition, the model has adaptation for atmospheric conditions and cold starts. Finally, the model estimates fuel rates using a global air-fuel ratio so that switching from gasoline to ethanol is seamless.

POWERTRAIN ENHANCEMENT

The stock turbocharged Weber MPE 750 motor (Figure 4) is a highly tuned and well developed engine made to be sporty and practical. While Weber didn't leave much room to improve this engine, the Madison team found some places to improve efficiency, power, and fuel economy.



Figure 4: Model of the PWC version of the Weber AG MPE 750 engine.

The crank train is made with a nitrided shaft and a four counterweight balance shaft that is gear driven. This balances 50% of the oscillating masses and reduces friction losses significantly over typical motorcycle engines as seen in Figure 5 [6].

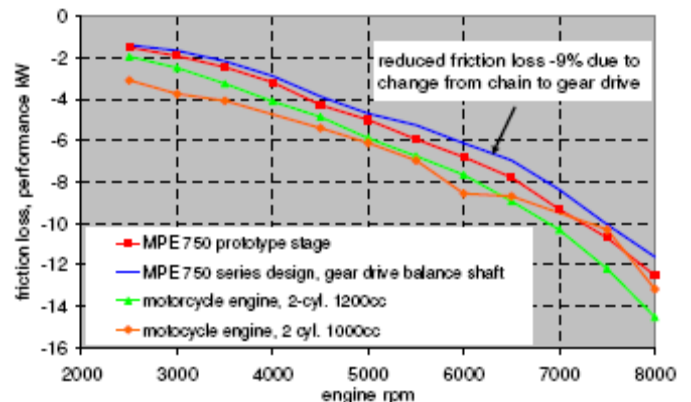


Figure 5: Results from friction loss testing on several engines conducted by Weber AG [6].

Also, to improve tune ability, efficiency and consistency, the team installed mass air flow sensors (MAS) and an electronic throttle body (ETB) in the intake system (Figure 6). The electronic throttle body replaces the two stock mechanical throttle bodies with the Bosch ETB found in the PWC version of the MPE 750 engine. This enhancement reduces complications of calibrating the engine, makes cold start possible, and improves idle conditions over an idle air controller.



Figure 6: Picture of the Bosch electronic throttle body utilized on Polaris MSX personal watercrafts.

Mass air flow sensors, when used in conjunction with an oxygen sensor in the exhaust manifold, makes control of the engine consistent, efficient, and accurate. The mass air flow sensor is beneficial in that it automatically detects any changes in operating conditions (i.e. plugged intake, change in air density, etc) and modifies the engines calibrations appropriately. However, there are two problems with using mass air flow sensors in a turbo engine. The first is that the MAS needs to be mounted upstream of the turbo intake so that it is exposed to ambient air. The team got around this by slightly modifying the stock FST primary airbox to fit the MAS and a smaller more efficient air filter. The second issue is that the MPE 750 intake uses a dump valve to release unneeded compressed air from the intake system. The “dumped” air needs to be accounted for when determining the mass of air entering the engine. This was accomplished by putting a smaller secondary MAS at the dump valve outlet and taking the difference of the two measurements as the actual mass air flow.

The Mototron engine controller coupled with the stock electronic boost controller allowed students to create their own turbo boost control strategy (Figure 7). This allowed for optimization of fuel consumption when boost was not needed while also minimizing lag. This also allowed for safeties to be built into the control strategy to limit boost in certain situations. When coolant temperature is below 20° C (68° F) boost pressure is limited to 1400 mbar (20.3 psia). As temperature increase to 60° C (140° F) pressure is linearly increased to 2000 mbar (29 psia) at full power. Boost is also reduced if coolant temperature exceeds 87° C (188.6° F). These safeties protect the engine and turbo from excessive wear and damage.

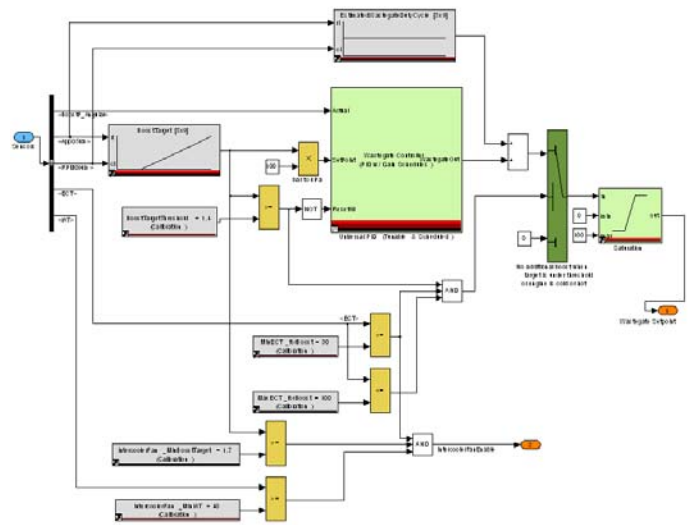


Figure 7: Image of control strategy Simulink model for electronic turbo boost control.

To utilize the emission, noise, and fuel economy capabilities of the engine, changes in clutching and gearing were performed. Numerous dynamometer and drive tests were performed to achieve the optimal combination of cam arms and spring tension in the drive clutch. Upon tuning of the drive clutch, the driven clutch (secondary clutch) was tuned in conjunction with the chaincase gearing to match engine speed to a targeted range of vehicle speeds. Prior to tuning, the driven clutch was replaced with a Team Industries roller secondary. The replacement of the manufacturer’s friction type secondary clutch with a roller type lends quicker shifting characteristics and increased transmission efficiencies from reduced friction.

Dynamometer tests on the turbo charged engine provided results that maximum horsepower is achieved at a range of engine speeds from 5000 to 6000 rpm. At 5000 rpm maximum horsepower is generated and stays constant until 6000 rpm before dropping off. From this an engine speed of 5500 rpm was targeted for wide open throttle position and operation. Targeting this engine speed allows the vehicle to stay in an operating area of maximum horsepower throughout a wide open run as over rev is inherent upon take off at wide open throttle. A slightly heavier 51g cam arm was used with a black Polaris spring to minimize over rev and increase upshifting force. The drive clutch combination was chosen to increase acceleration and minimize lost efficiency through belt slippage.

Investigation of BSFC charts indicated that maximum engine efficiency was produced between 4000 and 5000rpm. Secondary clutch adjustments were made to allow for operation within this engine speed range at low and mid-range load conditions. An increase in driven clutch spring tension raised the engines operating speed by reducing the upshift rate. A 23/44 gear-set was

installed in the chaincase, providing a gear reduction of 1.91. This gear combination was chosen to improve engine efficiency at cruising speed.

Another improvement made to the powertrain to enhance efficiency was to machine the driveshaft paddles into true circles. The team purchased a hollow, light weight driveshaft to reduce weight. Like most drive shafts purchased, this one came with plastic molded drive paddles that were un-machined. The molding process of these drive paddles do not create a very uniform shape, which can cause a snowmobile's track to change tension while moving. This effect of relaxing and tensioning of the track can make the snowmobile less efficient as well as increase snowmobile noise and wear. To reduce these effects, the driveshaft was machined on a lathe so that both drive paddles were symmetrical in shape.

FLEX FUEL CONSUMER ACCEPTABILITY

At the 2008 World Championship Snowmobile Derby in Eagle River, Wisconsin, consumers indicated that they would want flex fuel capability on their next snowmobile. As seen in Figure 8, over 75 percent of the volunteers would be more willing to purchase a new snowmobile if it had a flex fuel option. To make the snowmobile more widely accepted and practical for the public, it will be flex fuel capable. Flex fuel capability allows the user to run the engine on gasoline that is blended with anywhere from 0% to 85% ethanol. This capability will ensure the user is able to purchase and/or mix fuel from any pump.

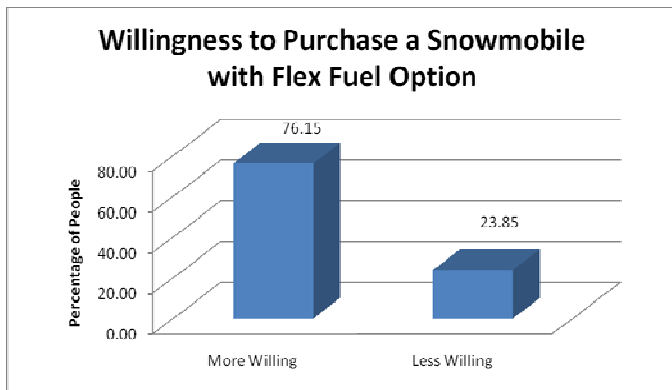


Figure 8: Results from a snowmobiler's survey indicating that they would be more likely to buy a snowmobile if it was flex fuel capable.

FUEL SYSTEM MODIFICATIONS

In order to run E85, modifications to the fuel delivery system were necessary. Because of ethanol's corrosive properties, the team upgraded all fuel system components to an ethanol compatible material. Ethanol fuel has lower energy per volume than gasoline, so the fuel injectors must be changed to accommodate the need for increased fuel flow. Madison identified a split-

port, 6-nozzle Bosch fuel injector that was capable of delivering nearly twice the fuel delivery rate. The injector specifications are given in Table 3.

Table 3: Fuel Injector Specifications

	Gasoline Injector	Ethanol Injector
Bosch Part #	0 280 156 236	0 280 156 290
Body Color	Yellow	Black
60 Sec Flow	213 g	400 g
Impulse Flow	6.3 mg	11.2 mg
Impulse Time	2.5 ms	2.5 ms
Rail Pressure	300 kPa	300 kPa
Driver Stage	SEFI	SEFI

Another effect of increased fuel flow is that a larger fuel filter is needed. The team decided to use an inline 35 micron sintered bronze fuel filter capable of delivering fuel at five gallons per minute. Ethanol dissolves impurities in poor fuel requiring a larger, finer fuel filter to protect the fuel system.

To allow for flex fuel capability, the team installed a Continental Flex Fuel sensor. The sensor was formally sold under the name Siemens VDO. It uses a dielectric measuring principle to detect the amount of alcohol in the fuel. Continental flex fuel sensor also reports fuel conductivity and temperature [7]. Since air fuel ratios are calculated on a gravimetric basis and fuel injectors are measured on a volumetric basis, the fuel temperature is measured to allow for density compensation.

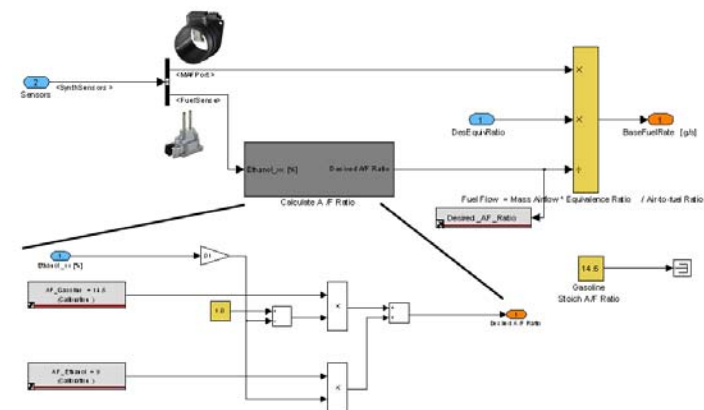


Figure 9: SimuLink block diagram for flex fuel engine control strategy, utilizes inputs from Continental flex fuel sensor and mass airflow sensor (MAF) to determine desired fueling rate.

These fuel properties, along with the mass air flow measurements are supplied to the Mototron controller. The engine management system is based on the physical models of the induction and combustion process instead of simply using correction tables for deviations from the base calibration. Wisconsin's calibration is designed to provide a prescribed global air-to-fuel ratio. The computing power of the Mototron controller is used to continually calculate the correct fuel injection amount utilizing the intake mass air flow rate, the fuel density and the desired fuel air ratio (Figure 9). Once the engine is 'roughly' (within 0.2% of target exhaust oxygen content) calibrated on the engine dynamometer, the closed loop fuel trim algorithm which utilizes the heated wide-band oxygen sensor is activated and is responsible for fine tuning the air-fuel ratio to a stoichiometric level.

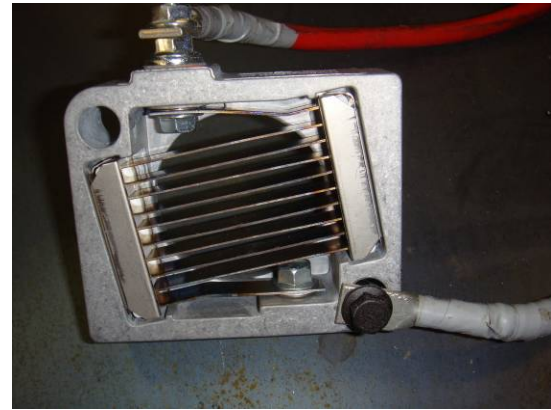


Figure 11: Picture of the Philips and Temro intake grid heater used to ensure cold startability.

COLD STARTABILITY

One disadvantage of ethanol based fuels is its inability to effectively vaporize as the temperature decreases. As seen in Figure 10, the volume of fuel needed to start an engine increases dramatically as either temperature decreases or ethanol concentration increases. [8]

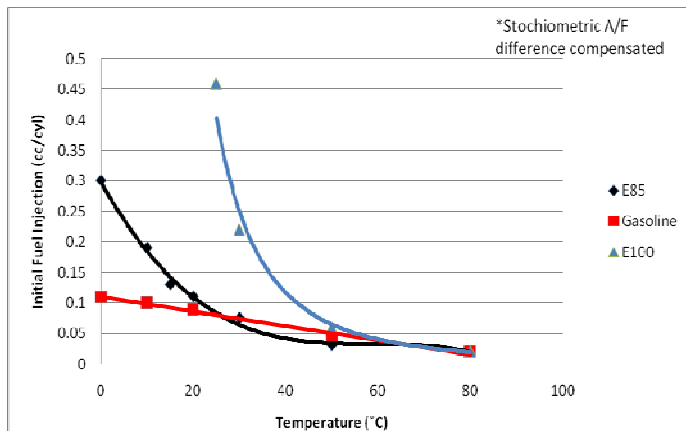


Figure 10: Graph of the initial fuel injection volume vs. fuel temperature at different ethanol concentrations [8].

In a study on the effect of ethanol on spark ignition engine cold startability, Toyota Motor Corporation states that one of the most practical methods of boosting the vaporization of ethanol is to heat it up by either directly heating the fuel or the intake air with a heater [8]. Therefore, Madison decided to install a Philips and Temro intake grid heater, seen in Figure 11, just before the throttle body. At 1.1 kW, this grid heater will heat up at a rate of 50° C (122° C) per second. While cranking at approximately 700 rpm, it takes about 1.15 seconds for the full volume of the hot air in the intake system to be inducted into the engine. This is sufficient to heat the fuel enough to make reliable cold start possible.

CALIBRATION

Typically, when calibrating an engine, there are two main goals to adhere to. The first is to minimize BSFC under part-throttle operation and the second is to maximize torque at WOT while staying within specified constraints. Typical constraints consist of emissions levels, running quality, exhaust gas temperature limits, knock limits, and engine speed [9]. These constraints define a window that the engine must be calibrated to operate within (Figure 12).

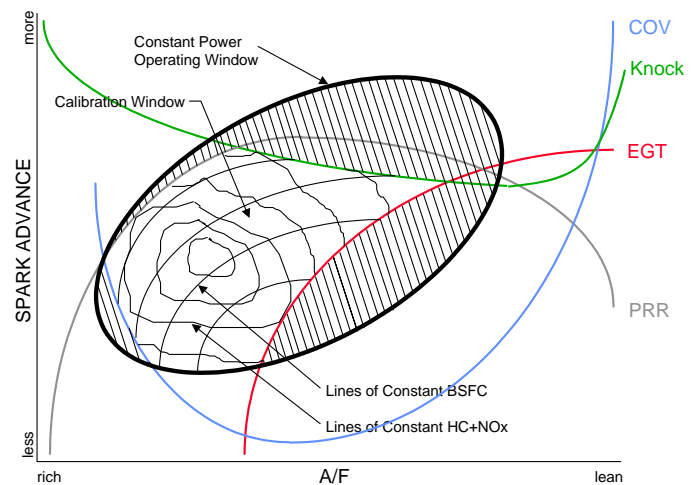


Figure 12: Graph of the typical calibration window of an internal combustion spark-ignition engine [9].

In the past, the UW-Madison team relied on extensively calibrating volumetric efficiency (VE) tables to determine air and fuel requirements based on a speed density system. This system, while effective, can be exhausting to do properly as the VE lookup table can contain thousands of values. This system also doesn't account for any changes in operating conditions and if not done properly, could cause undesired transient responses. So for 2009, Wisconsin systematically optimized the

engine using a water-brake dynamometer, a non-dispersive infrared CO meter, an Innovate wideband O₂ sensor, a chemiluminescent NO_x analyzer, exhaust thermocouple probes, and mass air flow sensors.. The CO meter was used to verify that both cylinders were operating at the same stoichiometric mixture in addition to verifying the O₂ sensor. In lieu of the VE lookup tables, the mass air flow sensors allowed for direct measurement of inducted air that can be input into the desired air/fuel ratio table, seen in Figure 9, giving an accurate and instantaneous required fuel rate. The air/fuel mixture was adjusted to stoichiometric while the spark timing was advanced to balance engine torque and engine-out NO_x levels. Exhaust gas temperatures were also monitored with thermocouples with an end goal of reaching 925° C (1697° F) to balance power and emissions within a safe operating regime. As a backup, the team did basic calibrations to the VE lookup table that would allow the engine to be operated in case of a MAS failure.

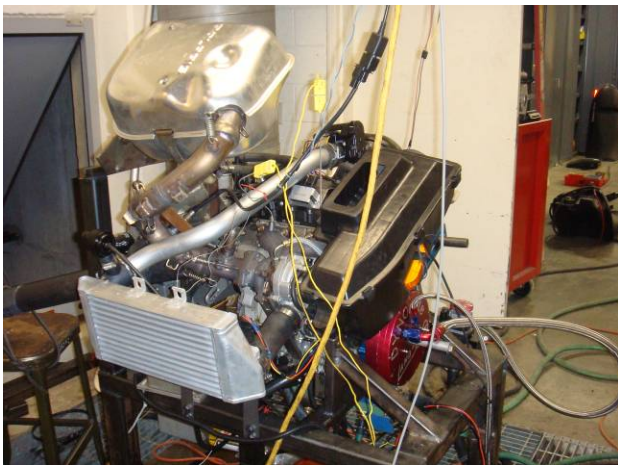


Figure 13: Picture of the Weber MPE 750 equipped with the custom camshaft operating on Madison dynamometer stand.

EMISSIONS

The first step in reducing emissions was the implementation of the custom camshaft for use with the turbocharged version of the Weber engine. In addition to providing the additional 20 kW of power, it did so without negatively impacting sound or power as the turbo charger ‘muffles’ the exhaust while recapturing rejected energy in the waste stream. In order to further reduce emissions to automotive standards, the Wisconsin team’s worked with W.C. Heraeus GmgH to customize a catalyst specifically for this engines operating regime. Because the CSC emissions scoring is based on a combination of HC, CO and NO_x levels, a three-way, platinum-based catalyst was chosen for its ability to effectively reduce all three pollutants simultaneously. The Hearsus washcoat was applied to a metal honeycomb substrate utilizing Emitec’s

SuperFoil® technology. This technology influences the flow distribution causing turbulence within the cell channels. The turbulence increases the conversion rate by increasing exhaust gas/washcoat contact time: allowing for the use of smaller volume catalysts and/or reducing back pressure [10].

Table 4: Catalyst Specifications.

Manufacturer	W.C Heraeus GmbH
Diameter	105mm
Length	140mm
Substrate	SuperFoil® Metal Honeycomb
Density	600 cpsi (cells per square inch)
Loading	Platinum 11.1 g/ft ³ Palladium 55.6 g/ft ³ Rhodium 8.3 g/ft ³

To optimize reduction of CO, HC and NO_x, the exhaust gases entering the three-way catalyst must alternate between slightly rich and slightly lean. As seen in Figure 14, the catalytic reduction efficiency for NO_x at a stoichiometric air-fuel ratio is slightly under 80%, while HC and CO are reduced at almost 90% efficiency. When a lean exhaust mixture passes through the catalytic converter, excess NO_x is absorbed on the surface of the substrate while the CO and HC are reduced to H₂O and CO₂ in the presence of excess oxygen. In contrast, when a fuel-rich exhaust mixture goes through the catalyst, the NO_x is released from the substrate and immediately reacts with the HC and CO to form N₂ and CO₂ and/or H₂O.

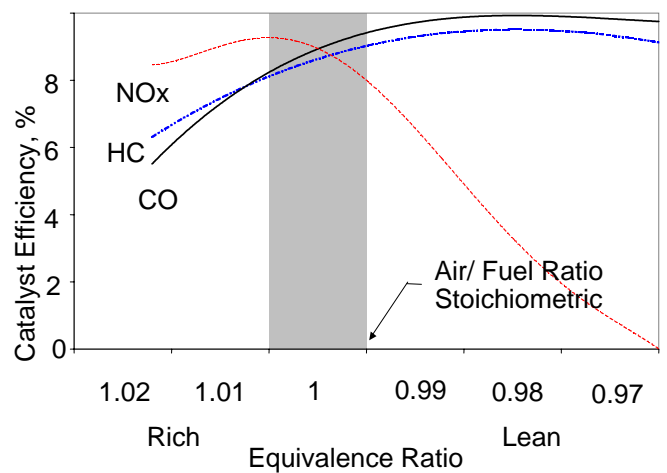


Figure 14: Figure showing the NO_x, CO, and HC conversion efficiency for a three-way catalytic converter as a function of exhaust gas air/fuel ratio operating on gasoline (Adapted from [11]).

Parameters with Mototron's closed-loop fuel trim algorithm control the lean/rich oscillation of the engine for maximum emission reduction. Figure 15 shows the oxygen sensor value in addition to the fueling multiplier. In this area of engine operation, the base calibration is slightly rich and so the emissions control algorithm has adjusted the fuel multiplier to oscillate around the stoichiometric value of 0.96. Because this engine is a two cylinder, the lean/rich parameters were adjusted for smooth engine operation which resulted in a 20 second cycle which is longer than a normal automobile engine.

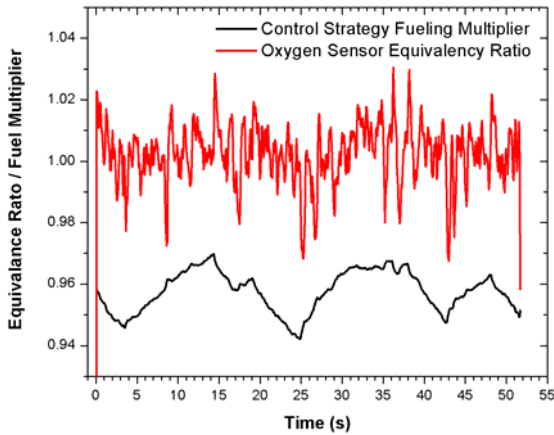


Figure 15: Figure of the Engine equivalence ratio oscillating near stoichiometric as a result of closed loop control with an exhaust O2 sensor .

Extensive emissions testing using a traditional California Analytical emissions bench was used to determine emission levels and catalyst efficiencies. The operating conditions of the engine during emissions testing are listed in Table 5.

Table 5: Engine operating parameters for the 2008 Bucky CFS during the five-mode emissions test [12].

	Engine Speed (rpm)	Torque (N-m)	Power (kW)
Mode 1 (WOT)	5500	105.9	61.0
Mode 2 (85%)	4675	54.0	26.4
Mode 3 (75%)	4125	34.9	15.1
Mode 4 (65%)	3575	20.1	7.5
Mode 5 (idle)	1500	0.0	0.0

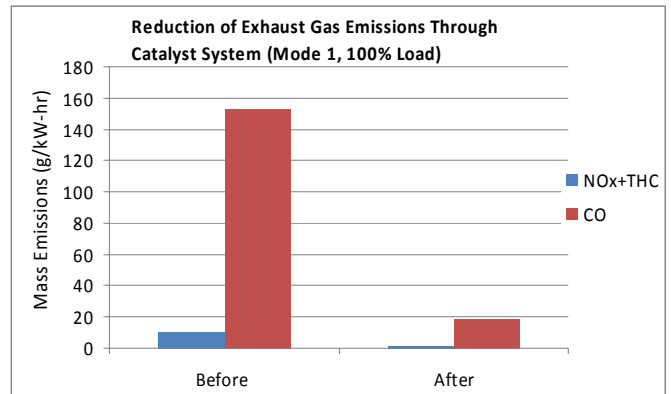


Figure 16: Figure of the catalyst system efficiency during mode 1 (100% load) operation. The catalyst yielded a 88% reduction in CO and NOx and a 89% reduction in THC over the engine's base emissions.

Testing on the sled for Mode 1 showed that the catalyst system yielded a reduction in the average specific mass emissions (HC+NO_x) from an untreated 10.1 g/kW-hr to 0.95 g/kW-hr, an 91% improvement. The catalyst also reduced CO emissions by 88%, from an untreated 153 g/kW-hr to 18.0 g/kW-hr. Figure 17 shows the final results of the emissions testing on the Bucky CFS after full optimization of the emissions reduction systems. The certified emission levels for the Bucky CFS 750 are 0.55 g/kW-hr, 0.12 g/kW-hr and 5.61 g/kW-hr for NO_x, THC and CO respectively.

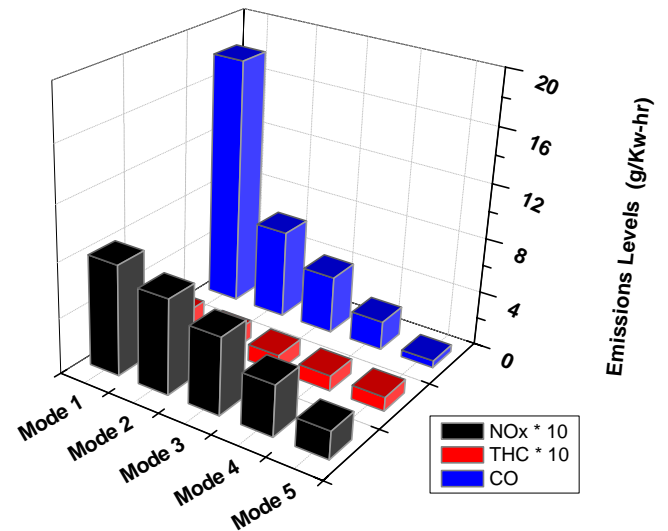


Figure 17: Figure of the post catalyst emission levels for the Bucky CFS engine operating on E85 fuel.

NOISE

Wisconsin's primary goal for sound reduction on the Bucky CFS was to reduce A-weighted sound pass-by levels below those of the current standard set by the International Snowmobile Manufacturers Association (ISMA), which is 78 dbA using SAE test procedure J192. A secondary goal was to reduce perceived sound levels to bystanders. Table 6 shows the A-weighted pass-by levels for the stock Polaris FST LX platform that the Bucky CFS is based on. Additionally shown are the sound emissions from a 2002 Arctic Cat 660 four-stroke and the average for two-stroke machines.

Table 6: A comparison of noise emissions from various over-snow vehicles. Measurements are on the A-weighted dB scale and based on pass-by testing at 15.24 m (50 ft). Derived from data in [13].

	33 km/hr	58 km/hr	75 km/hr	WOT	Idle
2002 Arctic Cat 660	65.8	72.0	72.3	71.6	42.1
2007 Polaris FST LX	66.1	72.2	72.6	74.3	51.4
Two-Stroke Snowmobile Average	70.7	73.9	75.3	78.7	55.4

MUFFLER DESIGN

As a starting point, redesigning the FST exhaust system offered the most potential for noise reduction in the space available. In addition, Wisconsin's emission strategy required the implementation of a single large catalyst.

Using the space still limited by packaging constraints on the right side of the snowmobile, students designed a three chamber catalytic muffler that fits in the same space used by the stock muffler. The 2009 system incorporates a single catalyst that is 105 mm in diameter and 140 mm long. The 2009 Wisconsin CSC catalyst system improves upon the 2008 system by keeping the exhaust manifold and exhaust pipes stock which helps lower exhaust backpressure. The catalyst is mounted inside of the muffler directly after the inlet. The configuration of the engine exhaust keeps tubing length to a minimum which helps ensure proper catalyst temperatures. The muffler itself is insulated with 3M Interam 1101 material surrounded by an aluminum heat shield housing. These features will help maintain sufficient catalyst temperatures while minimizing underhood temperatures.

Figure 18 shows a schematic drawing of the catalytic muffler. Exhaust flow from the engine flows through the stock pipes into the muffler inlet. It then enters the

catalyst through a diffusion cone to minimize pressure drop. The foil design of the catalyst induces turbulence between cells increasing exhaust gas contact with the substrate.

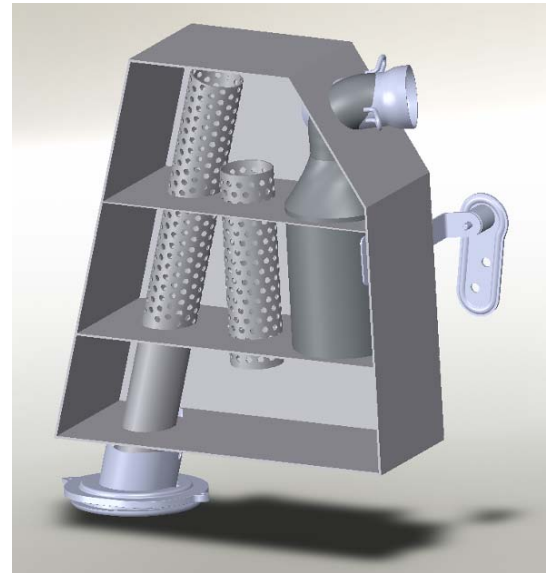


Figure 18: CAD Model of the three chamber catalytic muffler cutaway designed for Bucky CFS.

After passing through the catalyst chamber, the exhaust flow enters the first chamber of the muffler. The flow is then free to flow through a series of corrugated pipes to reduce high frequency sound and chambers to cancel the engine's low, fundamental frequencies. Because the Bucky CFS operates at 5000 rpm instead of 7000 rpm, the fundamental engine frequency is lowered for 116 Hz to 83 Hz respectively. This will give the Bucky CFS a deeper 'rumble' and will also benefit from a higher A-weighted reduction.

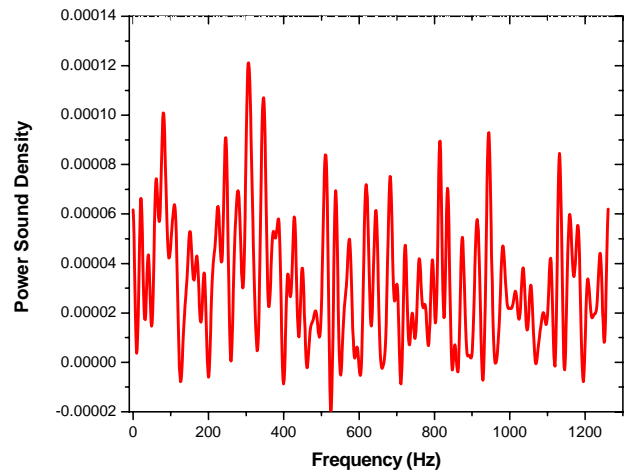


Figure 19: Graph of the MPE 750 engine with stock exhaust spectral sound spectrum measured at a distance of 10 ft at 5000 rpm.

MECHANICAL NOISE REDUCTION

With the redesigned muffler virtually eliminating exhaust noise, the team focused on mechanical noise emitted from the snowmobile. In order to identify the main contributors of the sound from the snowmobile, previous pass-by sound testing had been performed.

To quantify typical noise levels from a snowmobile chassis, Wisconsin performed various different sound tests including drive-bys at constant speed and during WOT acceleration on a snowmobile with a chassis and engine comparable to the 2009 entry. The protocol for the WOT tests was an entry at 24 km/hr with a transition to wide-open throttle at a point 22.5 m before the plane of the microphones (speed at the point crossing the plane of the microphones was 69 km/hr). Sound measurements were taken in a variety of snowmobile configurations (described below). To best determine the major source of noise the team did a spectral noise analysis, using dual microphones at a distance of 15 m on several 72 km/hr pass-by tests. This data was recorded using a Hi-Techniques HT-600 data acquisition system, allowing a thorough analysis of sound emissions.

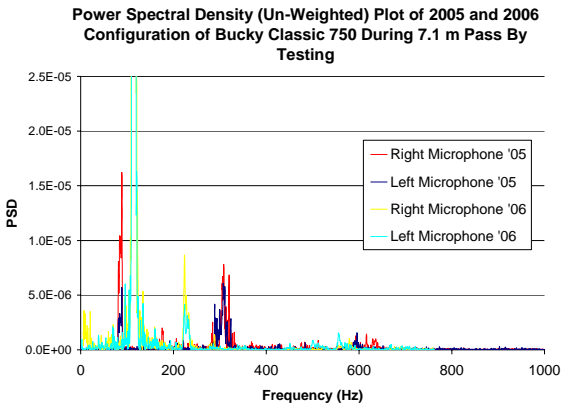


Figure 20: Spectral sound density of past UW-Madison CSC entries to determine typical sources of noise from a snowmobile. Testing was performed Feb 25, 2005 and March 1, 2006.

Figure 20 shows a Power Spectral Density plot from the Bucky 750 FX. This plot shows the sound power emitted from the sled as a function of frequency. Three distinct peaks can be seen near 100, 225, 300, and 600 Hertz. By calculating the first and second order contributions of the snowmobile components at 72 km/hr (Table 7), the sources of the peaks were discovered. The 100 Hz peak is first order engine noise, the 225 Hz peak is second order engine noise, and the 300 and 600 Hz peaks are first and second order noise produced where the track paddles interface the track. The right side 100 Hz and 225 Hz peak is much higher than the left side because the exhaust outlet is on the right side of the snowmobile.

Table 7: First and second order frequencies of sound emitted by three components of interest on the Bucky 750 FX.

	1st Order Frequency (Hz)	2nd Order Frequency (Hz)
Engine	83	166
Track-Paddle Interface	303	606
Chain Case	1345	2690

Madison's earlier research also proved that the majority of the sound from the engine was being emitted through the exhaust tailpipe and not directly from the engine through the hood and engine bay [14]. This makes it relatively easy to reduce the level of engine noise emitted by concentrating on improving the muffler instead of focusing on insulating the engine bay which adds weight, cost, and increases engine bay temperatures. The noise coming from the track paddle interface can also be reduced through relatively simple and effective mechanisms. Madison has achieved this three separate ways: installing a silent track in lieu of the OEM track, fabricating a dampener to insulate the noise from the drive paddles, and by ensuring all chassis components weren't resonating at typical operating conditions.



Figure 21: Picture of the Arctic Cat Silent Track installed in the Bucky CFS.

The Arctic Cat silent track has small opposing ramps placed on the inner surface near the outside edge of the track. These ramps compensate for flex in the track due to the lug spacing, creating an even radius of curvature as the track bends. This allows the track to move

smoothly over the front and rear idlers, reducing track friction, vibration and noise.

Another addition to the sound dampening package on the 2009 Bucky CFS is the drive paddle noise dampener located on the front arm of the rear suspension (Figure 22)



Figure 22: Picture of the drive paddle sound dampener installed on front suspension arm.

The drive paddle sound dampener isolates the sound produced by the drive paddles contacting the drive lugs on the track. This contact noise on the Bucky 750 FX was seen as a peak at 300 Hz in the 2005 test data. As the 2006 data shows (Figure 20), this 300 Hz peak was effectively reduced to zero with this modification.

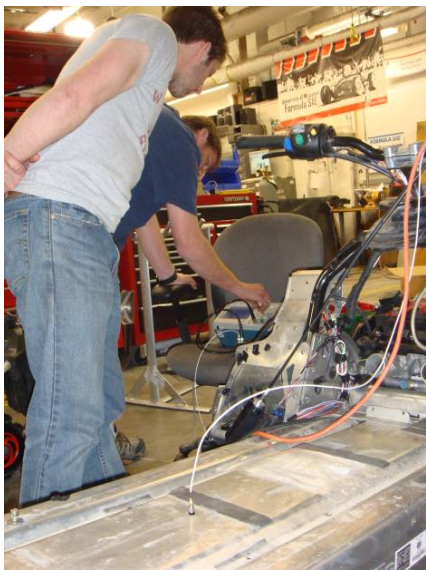


Figure 23: UW-Madison students obtaining frequency response of a snowmobile chassis with an accelerometer.

In addition to the mechanical sound reducing enhancements outlined above, the UW-Madison team decided to investigate the resonant frequency of the tunnel, looking for a possible track-tunnel sound amplification (Figure 23). Using a Hi-Techniques data acquisition system and PCB Piezoelectric accelerometer, the team discovered that the tunnel had a very similar construction as previous years with a resonant frequency close to the 300 Hz track vibration (Figure 24). This meant that any vibration from the track was being amplified by the tunnel, greatly increasing noise.

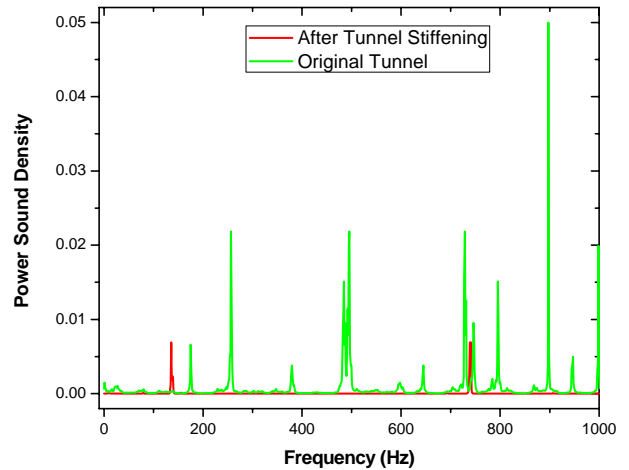


Figure 24: Figure of the Polaris IQ chassis frequency spectrum before and after tunnel stiffeners were added.

In an effort to change the resonance frequency of the tunnel, the team decided to add tunnel-stiffening angle brackets to the sides of the tunnel near the foot wells (Figure 25).

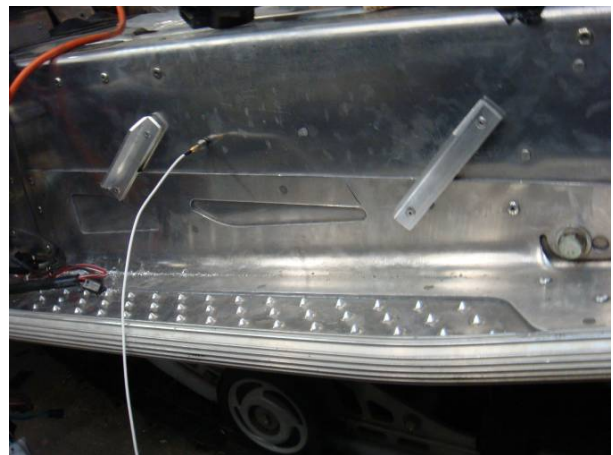


Figure 25: Picture of tunnel resonance being tested with tunnel stiffening ribs installed.

The frequency response graph in Figure 24 clearly shows the elimination of the natural frequency near 300 Hz of the tunnel through the use of the tunnel stiffeners. Besides eliminating the majority of the natural frequencies, the two major remaining modes were reduced in amplitude by factor of 1.5. This modification helped the team reduce sound power produced by the track and suspension in the Bucky CFS over 69% compared to earlier Wisconsin CSC entries.

OTHER SNOWMOBILE INFORMATION



Figure 26: Picture of the 2007 Polaris FST LX chassis at UWGP Ethanol plant.

The Madison team recognized that the base snowmobile for last year's entry had become old and outdated. The goal for a new chassis was one that would provide a balance of comfort and performance while being easily adapted to the current powertrain. The Madison team has had extensive experience with the Weber MPE 750 engine so the Polaris FS and FST models were an appropriate fit. The team decided on a 2007 FST IQ LX (Figure 26). This base chassis features Ryde FX front shocks and the legendary FAST M-10 rear suspension that provides the mixture of comfort and sport the team was seeking. It also has a 128 inch track which makes it excellent for both on and off trail riding.

LED Headlight Assembly

To reduce the overall electric load on the engine, the team decided to design and install light emitting diode (LED) headlights. LEDs are much more energy efficient than the stock incandescent bulbs while maintaining the required 200 foot visibility limit as required by the Wisconsin Department of Natural Resources [15]. The states of Michigan and Minnesota do not have distance

visibility requirements for snowmobile headlights. The headlight assembly consists of two 6 volt, 3 watt LEDs connected in series combination to the wiring harness, making a total electrical load of 6 watts with the same luminescence. The stock incandescent bulbs use 97 watts of power at low beam. Therefore, using the LEDs results in a power savings of 91 watts.

TRACTION

At last year's competition, several judges during the static handling event commented that handling and braking capabilities of the sled would be vastly improved by increased traction through the use of studs. Since one of the goals of this competition is to maintain performance and consumer acceptability of the snowmobile, Madison listened to the judges' comments and added studs in a 102 centerline pattern to help increase traction during acceleration, cornering and braking while minimizing the effects of studs pulling out of the track.

WEIGHT REDUCTION

One of the only ways to reduce CO2 emissions is by decreasing fuel consumption. It is a well excepted fact that the most efficient way to improve a vehicle's fuel economy is by reducing its weight. While lightweight components are effective at meeting this goal, they are very expensive and will go against the competition goals of keeping the snowmobile cost effective. However, there are certain components that can be modified or changed that will also reduce the overall weight. Madison began working on some of these weight reductions including exchanging the very heavy and complex stock reverse gearbox of the FST with a much lighter and simple design incorporated on the new 2009 Polaris Shift chassis's. The overall weight savings from this modification was 4.54 kg (10 lbs).

COST ESTIMATES

To help the Madison team determine an acceptable manufacturer's suggested retail price (MSRP), 115 snowmobilers were surveyed at the 2008 World Championship Snowmobile Derby in Eagle River, WI. The individuals indicated the maximum surcharge that they would be willing to pay for a snowmobile utilizing clean and quiet technologies was between \$300 and \$600. The results are given in Figure 27.

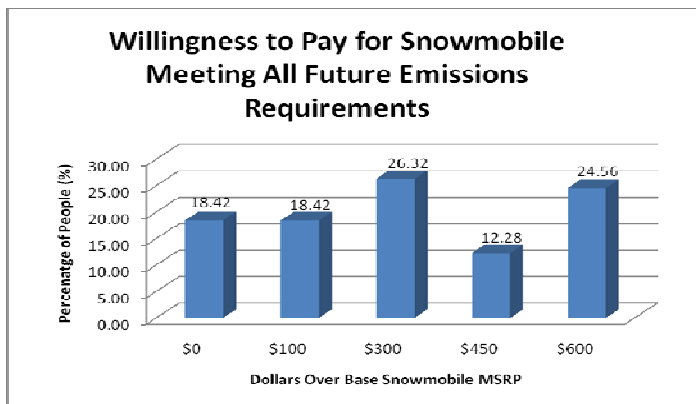


Figure 27: A survey of 115 snowmobilers shows that an added cost of \$600 for clean and quiet technologies will be acceptable to many consumers.

Every component of the Bucky CFS is designed for manufacturability. In fact, many of the technologies are currently in use in other transportation applications such as the automotive camshaft, mass air flow sensors, and electronic throttle bodies. The values listed in the cost summary of Table 8 are based on the assumption that parts are either manufactured in production quantities of at least 5000, plus 50% [12]. For 2009, Madison chose to apply what already works and keep things simple. By using available parts to find a compromise between performance and good emissions/fuel economy, the team was able to concentrate on fine tuning the sled in places such as engine calibrations, sound reduction through good design, etc. While these modifications add value to the sled, they would not significantly increase the price to the end user. Actually, many of the components that replaced stock parts were actually cheaper. As seen in Table 8, the total cost of upgrades to the 2009 Madison entry is about \$610, which is close to the upper limit of the range that consumers would be willing to pay for clean and quiet technologies.

Table 8: Projected MSRP of the 2009 Bucky CFS.

Item	2009 UW-Madison CFS	2009 IQ Turbo Dragon
2009 Polaris Turbo Dragon	N/A	\$10,499
2007 Polaris FST LX	\$9,599	N/A
Sled Modifications	\$300.00	None
Catalysts (1)	\$310.00	None
Total	\$10,209	\$10,499

CONCLUSION

The 2009 University of Wisconsin – Madison Clean Snowmobile Challenge entry drastically improves upon the best available technology in performance and emissions standards for over-snow recreational vehicles. Taking into consideration consumer performance requirements for an environmentally friendly snowmobile, the team engineered and installed a new, powerful turbocharged four-stroke powerplant that combined satisfying performance with EPA 2012 emissions compliance. The Bucky CFS's flex fuel capability gives consumers the ability to utilize renewable fuels. Utilizing a specialized low valve overlap camshaft and a custom exhaust equipped with a three-way catalyst, the Bucky CFS emission levels are well below EPA's 2012 emission requirements while increasing fuel economy. The redesigned drivetrain and exhaust after-treatment system ensures that Wisconsin's sled does not damage the environment it tours. Designed for manufacturability and aesthetically pleasing packaging, the 61 kW, studded Bucky CFS is a cost-effective solution for performance-oriented riders seeking a cleaner, quieter snowmobile.

ACKNOWLEDGMENTS

The University of Wisconsin Clean Snowmobile team gratefully acknowledges the support of the College of Engineering and specifically the other UW vehicle projects. The team also thanks its many sponsors, especially Polaris Industries, Weber AG, and United Wisconsin Grain Producers LLC for their extensive support. The team also thanks Polymer Technologies Inc, National Instruments, Mototron Control Solutions, W.C Heraeus, Emitec, 3M, Philips and Temro, Continental Corp., and Castle Racing for supporting us with the best available products. Additionally, the team wishes to thank PCB Piezotronics for the donation of sound equipment vital in the testing and reduction of sound emissions from the Bucky CFS.

The team would also like to thank their advisors, Ethan K. Brodsky and Glenn R. Bower. When it comes down to crunch time, their assistance is often overlooked but without their expertise, commitment of time, enthusiasm and willingness to teach, this project would not have been possible.

REFERENCES

1. "Riders' Demand Cleaner, More Efficient, Smoother Riding Snowmobiles – Polaris Delivers." SnowGoer Canada. <http://www.snowgoercanada.com/news/news.asp?ArticleID=91> (Website accessed 8/12/2008)
2. Lela, C., White, J., Haines, H., and Sacklin, J. "Laboratory Testing of Snowmobile Emissions: Southwest Research Institute." Report number SwRI 08.05486. July 2002. Montana Department of Environmental Quality, Helena, Montana, and National Park Service, Yellowstone National Park, Wyoming.
3. "SDI-SDI." Bombardier Recreational Products. http://www.ski-doo.com/media/2004_SOTY.pdf (Website accessed 3/1/2006)
4. Bauer, T., Boyarski, N., Mauermann, F., *et al.*, "A Clean, Quiet, Safe, High-Performance Snowmobile." March 2003. SAE Clean Snowmobile Challenge Technical Paper, University of Wisconsin – Madison.
5. Cameron, Kevin. "Parallel Paths" SnowTech Magazine. <http://www.snowtechmagazine.com/articles/parrallel.html> (Website accessed 3/1/2006)
6. Wizgall, Eberhard, Kohler, Beat. "The Multi-Purpose Engine MPE 750 from Weber Motor AG." SAE number 2004-32-0033. September 2004. Small Engine Technology Conference.
7. Continental Flex Fuel Sensor. http://usa.vdo.com/products_solutions/cars/powertrain/sensors/powertrain/flex-fuel-sensor/ (Website accessed 2/20/2009)
8. Tsunooka, Hosokawa, Utsumi, Kawai, Sonoda. "High Concentration Ethanol Effect on SI Engine Cold Startability." Toyota Motor Corporation. SAE number 2007-01-0236. January 2007.
9. Suhre, Blake R. "Mototron Engine Control and Calibration Basics Rev. 10." Mototron Corporation. September, 9, 2006.
10. Emitec Innovations. <http://www.emitec.com/index.php?lang=en&mid=e4&doc=50> (Website accessed 2/20/2008)
11. Heywood, J.B. "Internal Combustion Engine Fundamentals." McGraw Hill, Inc 1988.
12. 2009 SAE Clean Snowmobile Challenge Rules. <http://www.sae.org/students/cscrules.pdf> (Website accessed 2/20/2009)
13. Daily, John. "Supplemental Over-Snow Vehicle Sound Level Measurements." Conducted for the Winter Use Plan Supplemental Environmental Impact Statement. Prepared for State of Wyoming. February 2002.
14. Wallander, Lukas, Schumacher, Rakovec, Bower. "Improving Upon Best Available Technology: A Clean and Quiet Snowmobile." University of Wisconsin – Madison. February 2006.
15. "Wisconsin Snowmobile Laws." Wisconsin Department of Natural Resources. <http://www.dnr.state.wi.us/org/es/enforcement/D/OCS/SnomoRegs04.pdf> (Website accessed 2/27/2007)